

kupu

Floodlight Street Light Series

www.kupuled.com

2026-2027



Tiktok

kupu

Address: No. 21-1 Yongchang Road, Huacheng Street, Huadu District, Guangzhou
Tel: 020-36933476 / 36963478
Tiktok: ALT1349
Website: www.kupuled.com
E-mail: kp@kupuled.com




GZAILITELED&KUPU, established in Guangzhou, China, is a comprehensive energy-saving technology enterprise that integrates the research and development, production, sales, and service of LED outdoor landscape lighting, cultural and tourism lighting, bridge and building lighting products. The company has been deeply involved in the field of lighting for more than 17 years, with outdoor high-power LED lighting technology as its core feature, focusing on providing professional and customized light environment solutions for global customers.

Our company's business covers OEM/ODM manufacturing and engineering project support. Our products are widely used in outdoor facilities, large-scale real estate, commercial advertising, tourist attractions, villa lighting and other fields. Our products are also exported to international markets such as the Middle East, Europe and America. Our main products include LED floodlights, wall washers, ambient lighting, interactive lighting equipment, and intelligent lighting control APP systems, with a power coverage of 1W-1260W. We are one of the enterprises in the industry with the most complete series of outdoor LED floodlights and the largest power span.

Relying on its independent research and development system, the company has mastered core technologies such as optical lens design, external structure development, PCB circuit optimization, and intelligent control systems, and holds more than 40 patent rights. With the research and development concept of "simplicity, comfort, softness, and energy saving", we have created a modular narrow beam imaging technology to achieve precise light control and efficient energy saving. Our products have passed ISO9001 quality management system certification and obtained authoritative qualifications such as CCC, CE, ROHS, CQCMA at home and abroad, and our quality is recognized by the industry.

Elite Optoelectronics always takes "light quality" as its foundation and is committed to creating the ultimate light environment. With our full industry chain R&D and manufacturing capabilities and global service network, we look forward to working together with our partners to empower urban lighting aesthetics with innovative technology and jointly build a green and smart lighting future.

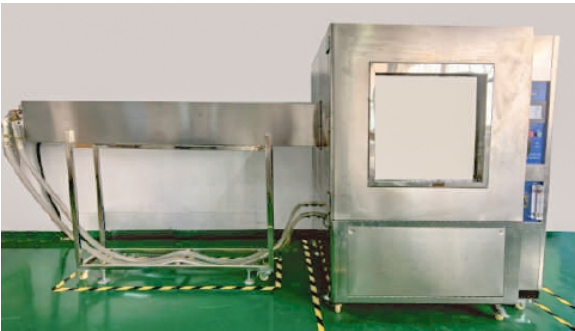

IP Waterproof Test



Reflow Soldering Equipment



Integrating Sphere



Distributed Testing



Temperature Cycling Test



SMT Equipment



Automated Sealing Equipment

Qualification and Honor

Patent Certificate



Floodlight Series



KUPU-FG50S
50W
P01-02



KUPU-FG50
50W
P03-04



KUPU-FG100
100W
P05-06



KUPU-FG150
150W
P007-008



KUPU-FG200
200W
P09-10



KUPU-FG300
300W
P11-12



KUPU-FG400
400W
P13-14

LED Floodlight Series A



KUPU-T75A
75W/100W
P15-16



KUPU-T150A
150W/200W
P17-18



KUPU-T240A
240W/300W
P19-20



KUPU-T360A
360W/400W
P21-22



KUPU-T450A
450W/500W/550W/600W
P23-24

LED Floodlight Series B



KUPU-T30B
30W/60W
P25-26



KUPU-T100B
80W/100W/120W
P27-28



KUPU-T150B
150W
P29-30



KUPU-T200B
200W/240W
P31-32



KUPU-T300B
300W/360W
P33-34



KUPU-T400B
400W/480W
P35-36

Street Lamp Series A



KUPU-LD30-1A
30W/50W
P37-38



KUPU-LD100-2A
100W/150W
P39-40



KUPU-LD200-4A
200W/240W/300W
P41-42

► Street Lamp B



KUPU-LD30B
30W
P43-44



KUPU-LD50B
50W
P45-46



KUPU-LD100B
150W
P47-48



KUPU-LD150B
150W
P49-50



KUPU-LD200-4B
200W
P51-52



KUPU-LD240B
240W
P53-54

► LED Street Light



KUPU-LD50C
50W
P55-56



KUPU-LD100C
100W
P57-58




KUPU-LD150C
150W
P59-60




KUPU-LD200C
200W
P61-62


► Solar Street Light Series



KUPU-TER-F40
40W
P63-64



KUPU-TER-F60
60W
P65-66



KUPU-TER-F80
80W
P67-68



KUPU-TER-Y40
40W
P69-70



KUPU-TER-Y50
50W
P71-72



KUPU-TER-Y60
60W
P73-74



KUPU-TER-Y80
80W
P75-76

kupu




General Parameters

Product Name:	Floodlight Lamp
Power:	50W
Light Source:	2835
Number of LEDs:	96pcs
Luminous Efficiency:	2200-6000K
Color Temperature:	160-180LM/W
Voltage:	AC220V
Control Method:	ON/OFF
Lens Angle:	30° / 60° / 90°
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	280×225×52mm
Product Weight:	1.7KG
Packaging Size:	700×252×317mm
Number of Pieces Per Box:	17PCS/19KG


"For more information, please visit: www.kupuled.com"



Product Size

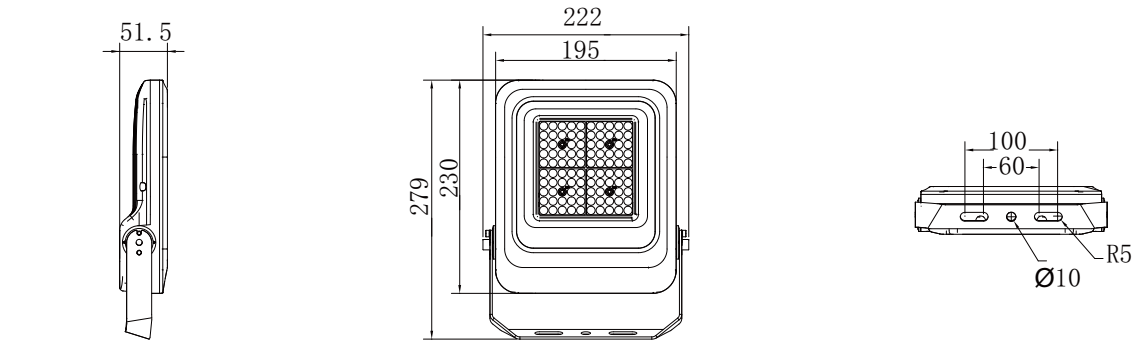

Light Specification

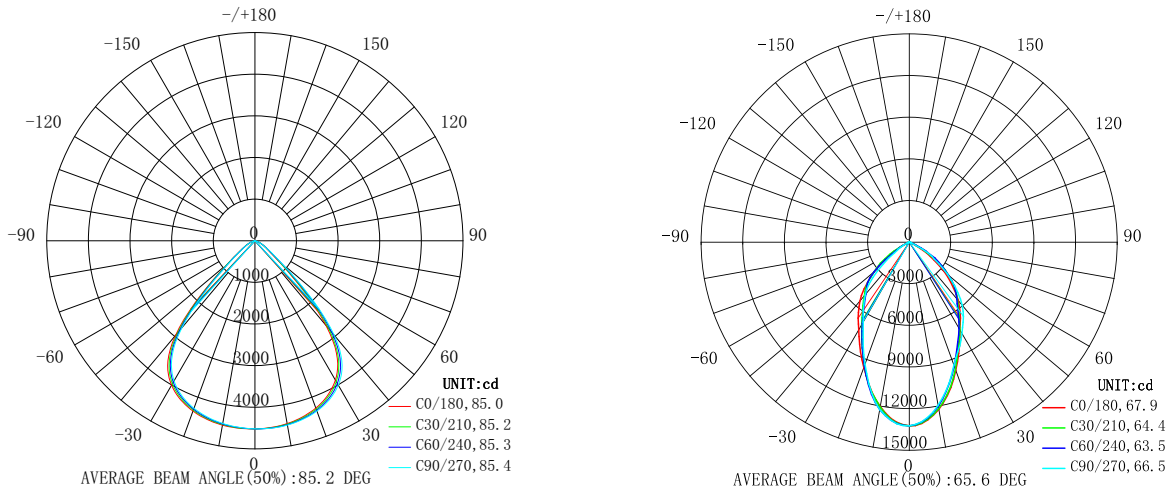




General Parameters

Product Name:	Floodlight Lamp
Power:	50W
Light Source:	2835
Number of LEDs:	144pcs
Luminous Efficiency:	2200-6000K
Color Temperature:	160-180LM/W
Voltage:	AC220V
Control Method:	ON/OFF
Lens Angle:	30° / 60° / 90°
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	318×270×64mm
Product Weight:	2.3KG
Packaging Size:	656×297×357mm
Number of Pieces Per Box:	8PCS/20.5KG


"For more information, please visit: www.kupuled.com"



Product Size

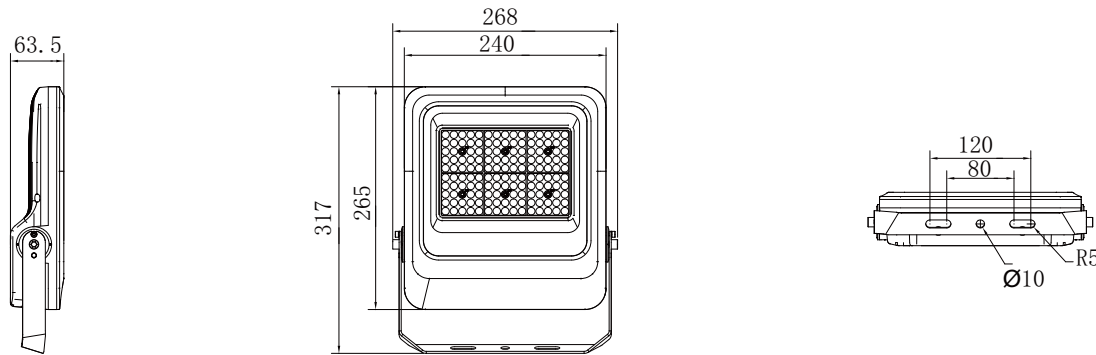

Light Specification

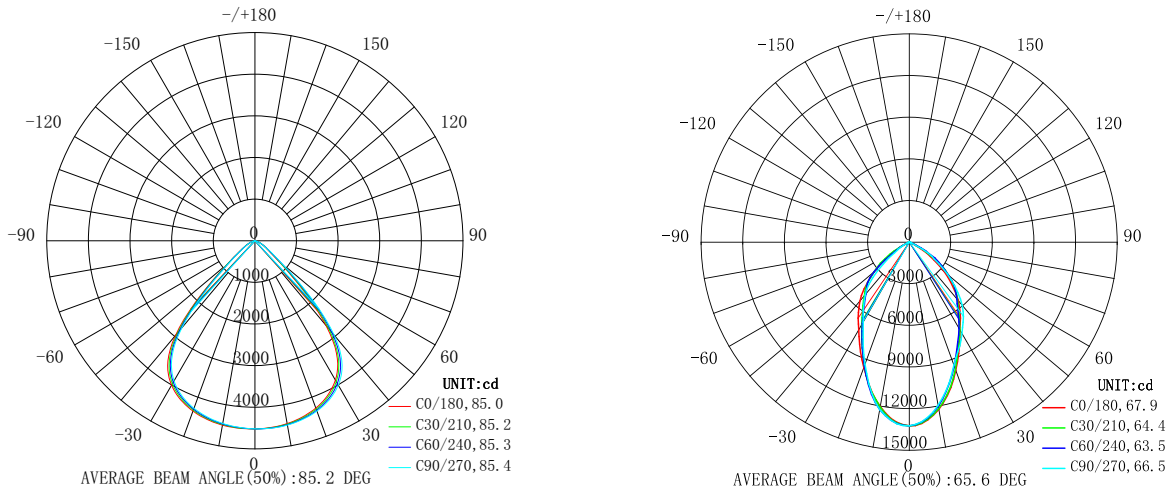

Floodlight KUPU-FG100

kupu




General Parameters

Product Name:	Floodlight Lamp
Power:	100W
Light Source:	2835
Number of LEDs:	216pcs
Luminous Efficiency:	2200-6000K
Color Temperature:	160-180LM/W
Voltage:	AC220V
Control Method:	ON/OFF
Lens Angle:	30° / 60° / 90°
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	352×285×64mm
Product Weight:	2.85KG
Packaging Size:	492×315×392mm
Number of Pieces Per Box:	6PCS/18.5KG


"For more information, please visit: www.kupuled.com"



Product Size

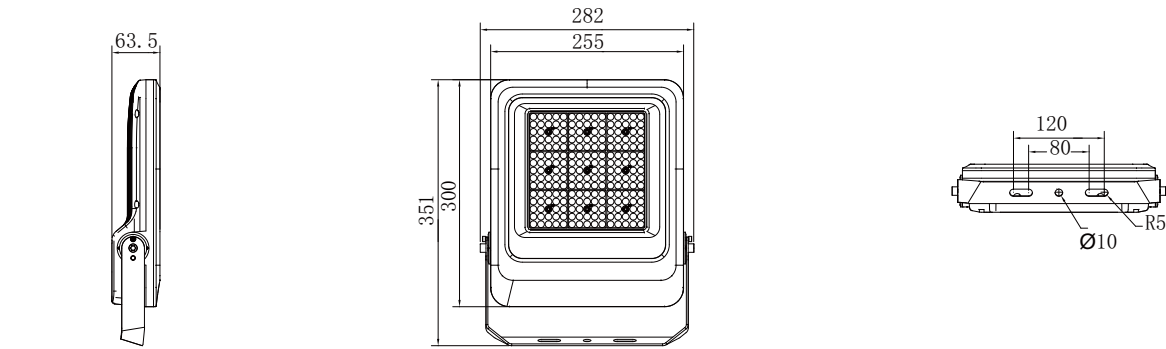

Light Specification

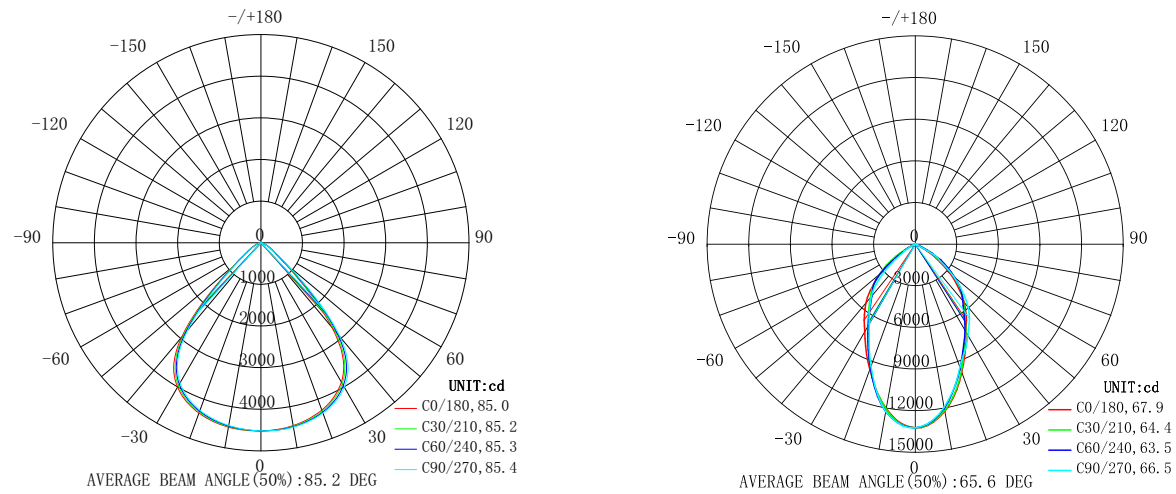

Floodlight KUPU-FG150

kupu




General Parameters

Product Name:	Floodlight Lamp
Power:	150W
Light Source:	2835
Number of LEDs:	288pcs
Luminous Efficiency:	2200-6000K
Color Temperature:	160-180LM/W
Voltage:	AC220V
Control Method:	ON/OFF
Lens Angle:	30° / 60° / 90°
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	392×335×64mm
Product Weight:	4KG
Packaging Size:	410×365×435mm
Number of Pieces Per Box:	5PCS/22KG


"For more information, please visit: www.kupuled.com"



Product Size

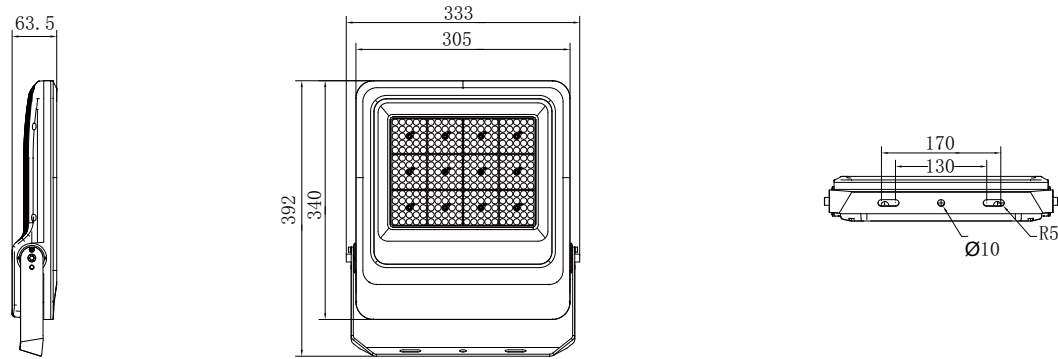

Light Specification

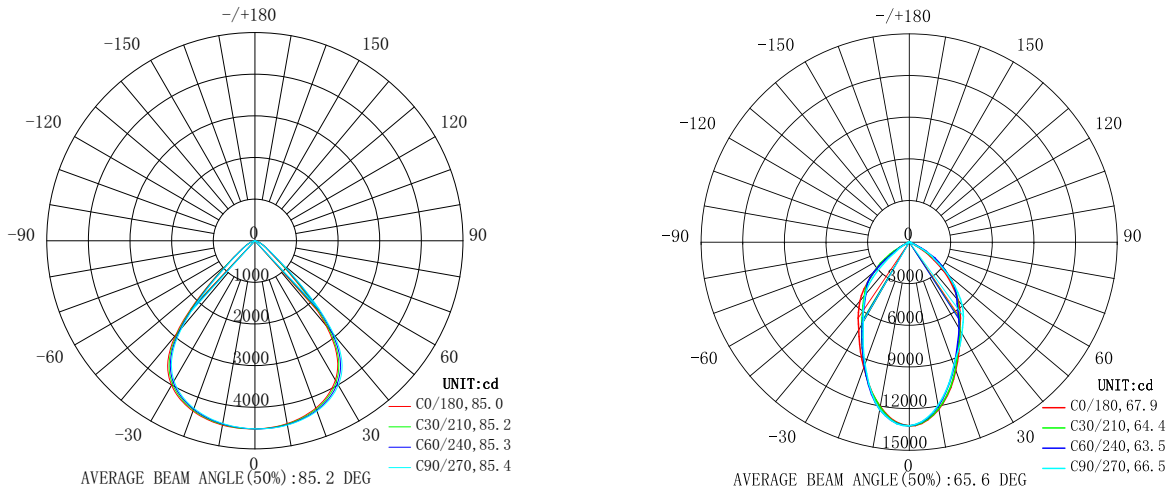

Floodlight KUPU-FG200

kupu




General Parameters

Product Name:	Floodlight Lamp
Power:	200W
Light Source:	2835
Number of LEDs:	600pcs
Luminous Efficiency:	2200-6000K
Color Temperature:	160-180LM/W
Voltage:	AC220V
Control Method:	ON/OFF
Lens Angle:	30° / 60° / 90°
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	450×335×64mm
Product Weight:	4.7KG
Packaging Size:	495×390×485mm
Number of Pieces Per Box:	4PCS/22KG


"For more information, please visit: www.kupuled.com"



Product Size

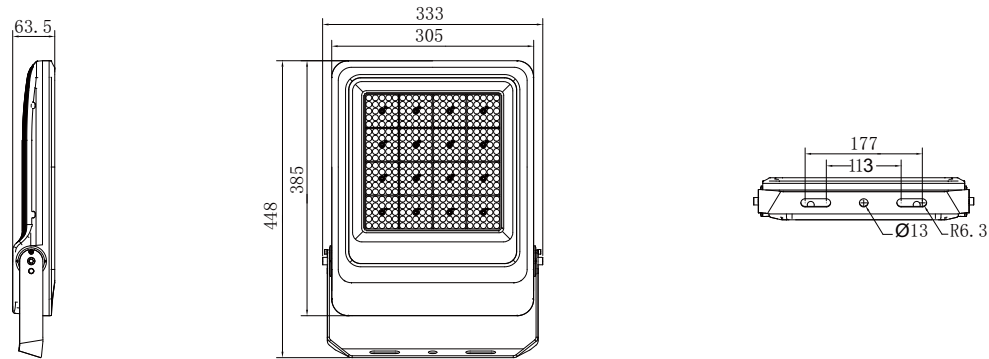

Light Specification

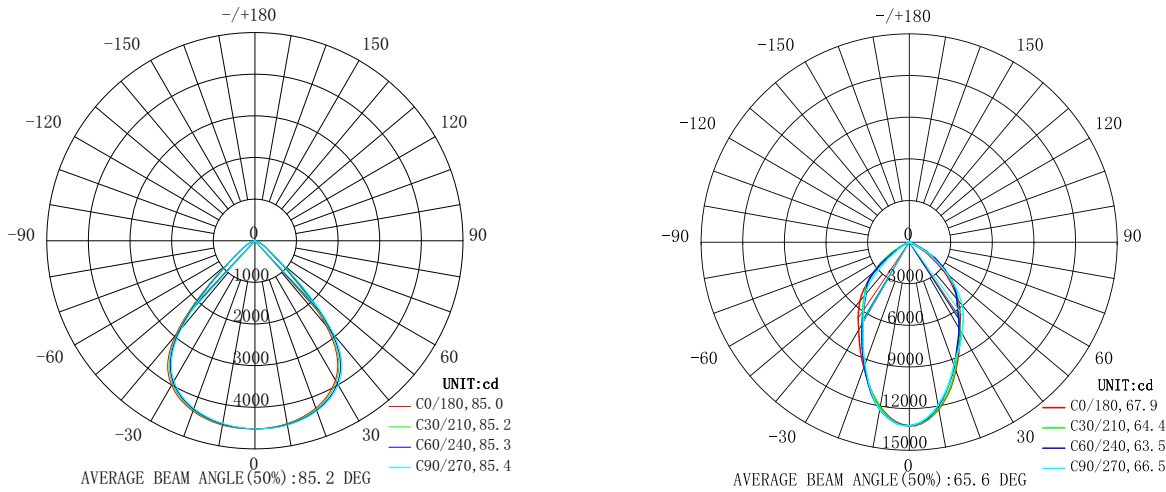




General Parameters

Product Name:	Floodlight Lamp
Power:	300W
Light Source:	2835
Number of LEDs:	600pcs
Luminous Efficiency:	2200-6000K
Color Temperature:	160-180LM/W
Voltage:	AC220V
Control Method:	ON/OFF
Lens Angle:	30° / 60° / 90°
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	515×385×67mm
Product Weight:	6.5KG
Packaging Size:	575×435×400mm
Number of Pieces Per Box:	3PCS/22KG


"For more information, please visit: www.kupuled.com"



Product Size

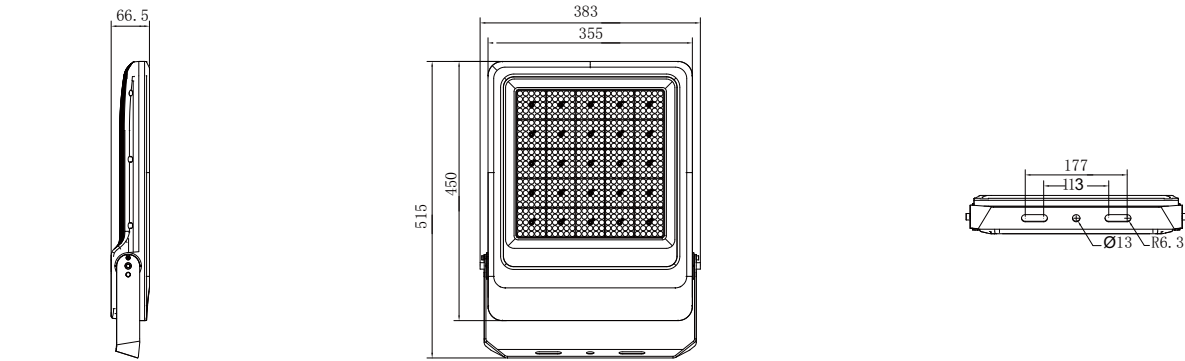

Light Specification

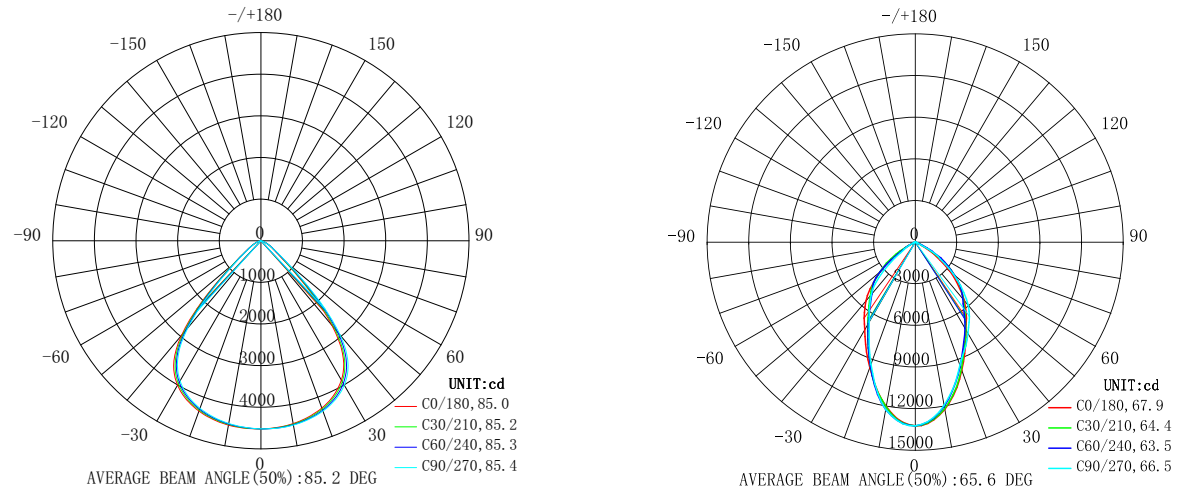




General Parameters

Product Name:	Floodlight Lamp
Power:	400W
Light Source:	2835
Number of LEDs:	840pcs
Luminous Efficiency:	2200-6000K
Color Temperature:	160-180LM/W
Voltage:	AC220V
Control Method:	ON/OFF
Lens Angle:	30° / 60° / 90°
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	577×483×68mm
Product Weight:	9.7KG
Packaging Size:	645×535×275mm
Number of Pieces Per Box:	2PCS/23KG


"For more information, please visit: www.kupuled.com"



Product Size

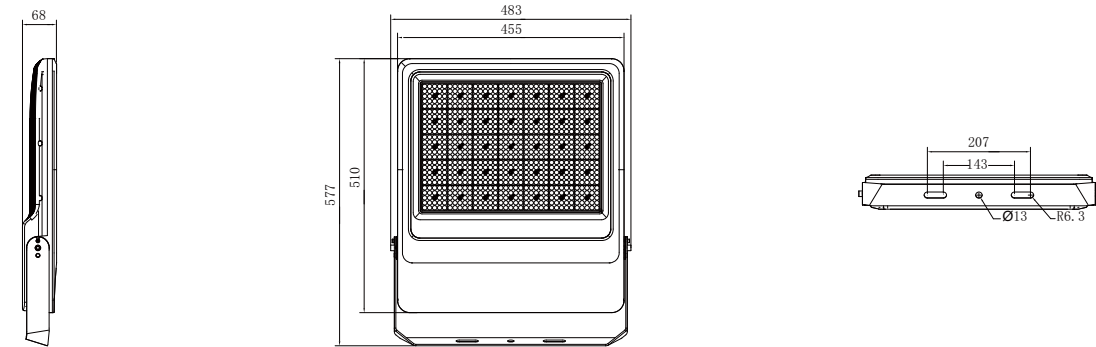

Light Specification

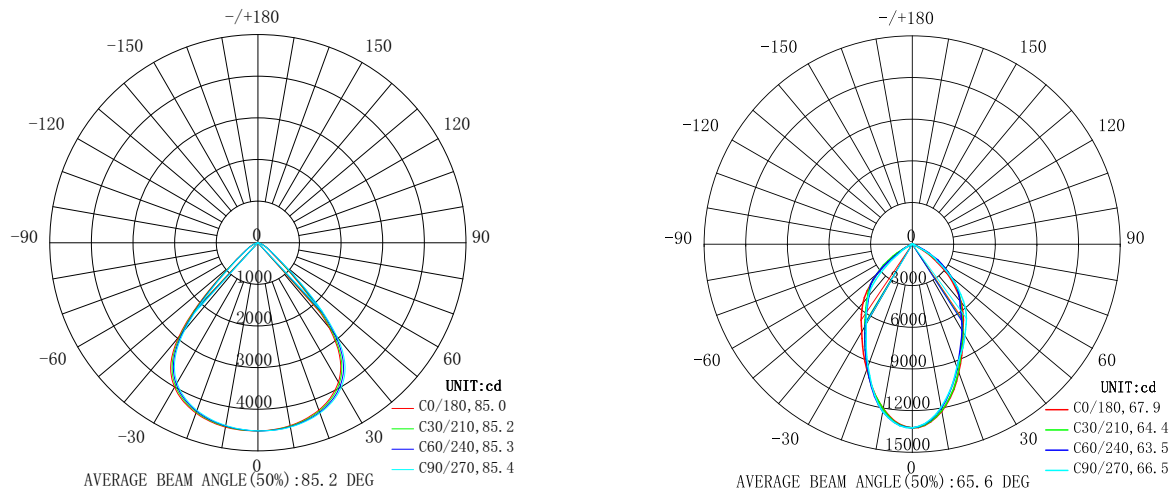




General Parameters

Product Name:	LED Floodlight
Power:	75W / 100W
Light Source:	7070
Number of LEDs:	24pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L241×W96.5×H250
Product Weight:	3.1KG
Packaging Size:	L265×W130×H265
Number of Pieces Per Box:	1PCS/3.6KG


"For more information, please visit: www.kupuled.com"



Product Size

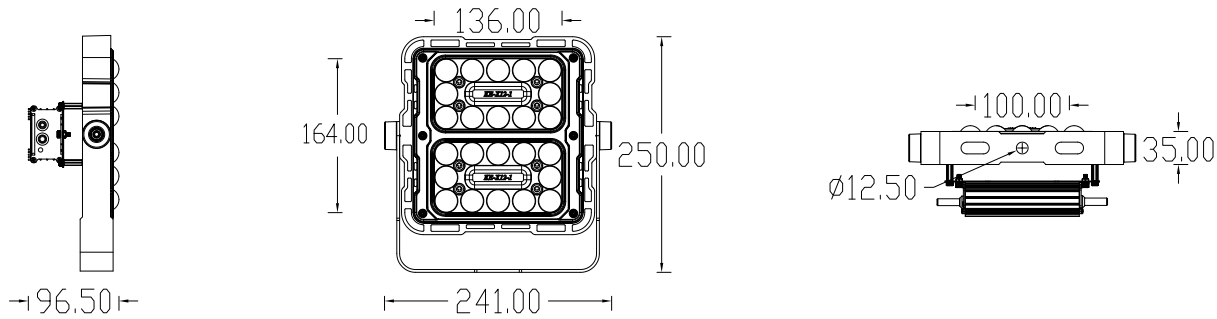

Light Specification

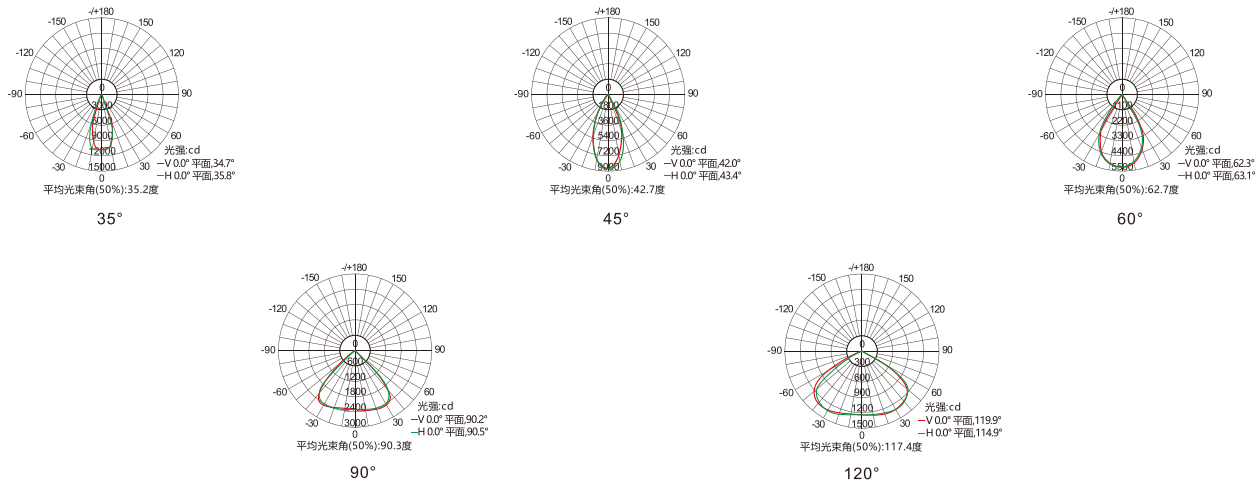





General Parameters

Product Name:	LED Floodlight
Power:	150W / 200W
Light Source:	7070
Number of LEDs:	48pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L420×W96.5×H250mm
Product Weight:	4.9KG
Packaging Size:	L435×W130×H255mm
Number of Pieces Per Box:	1PCS/5.5KG


"For more information, please visit: www.kupuled.com"

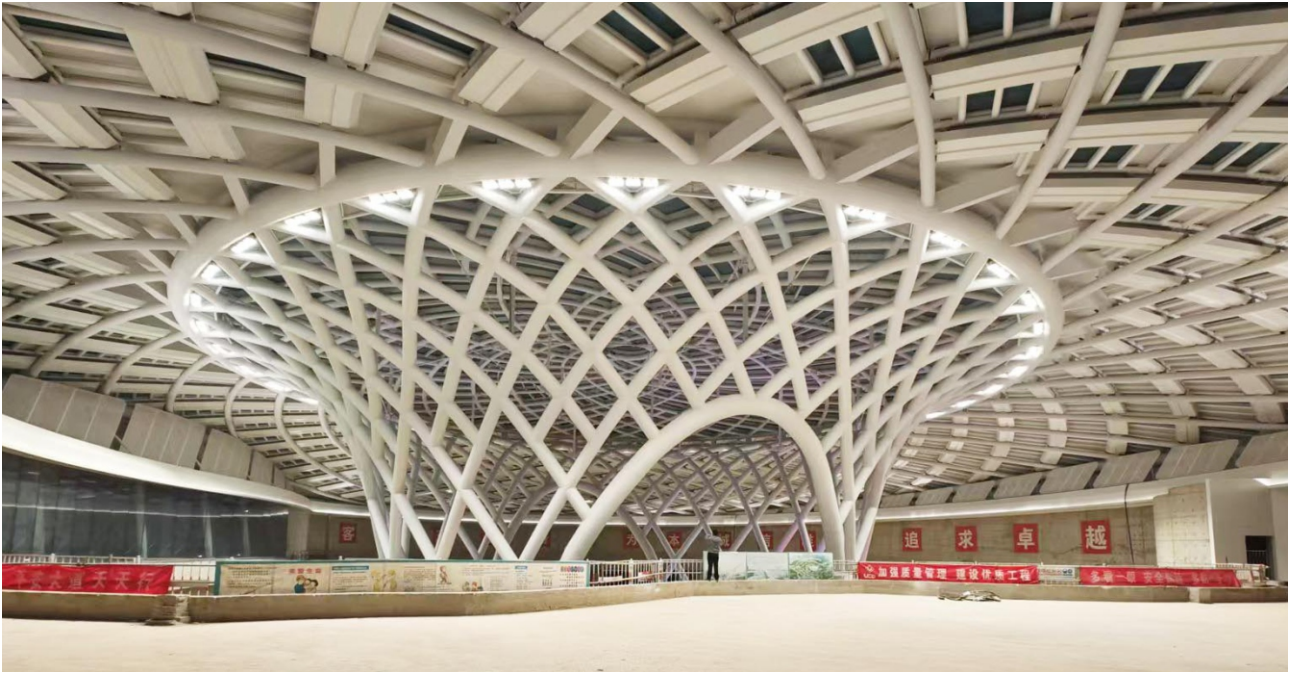

Product Size

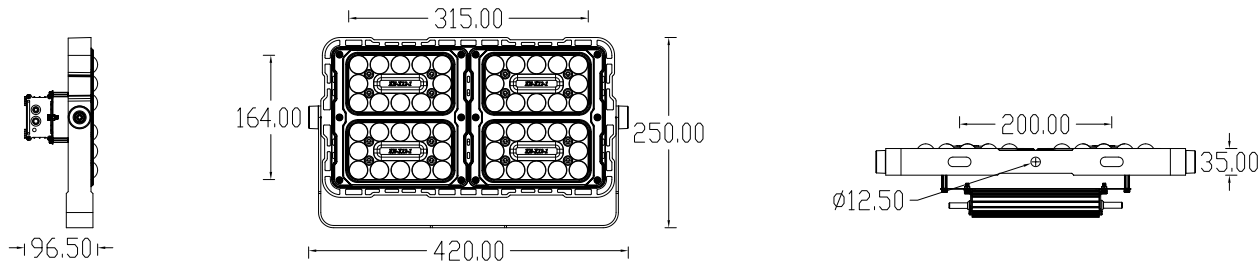

Light Specification

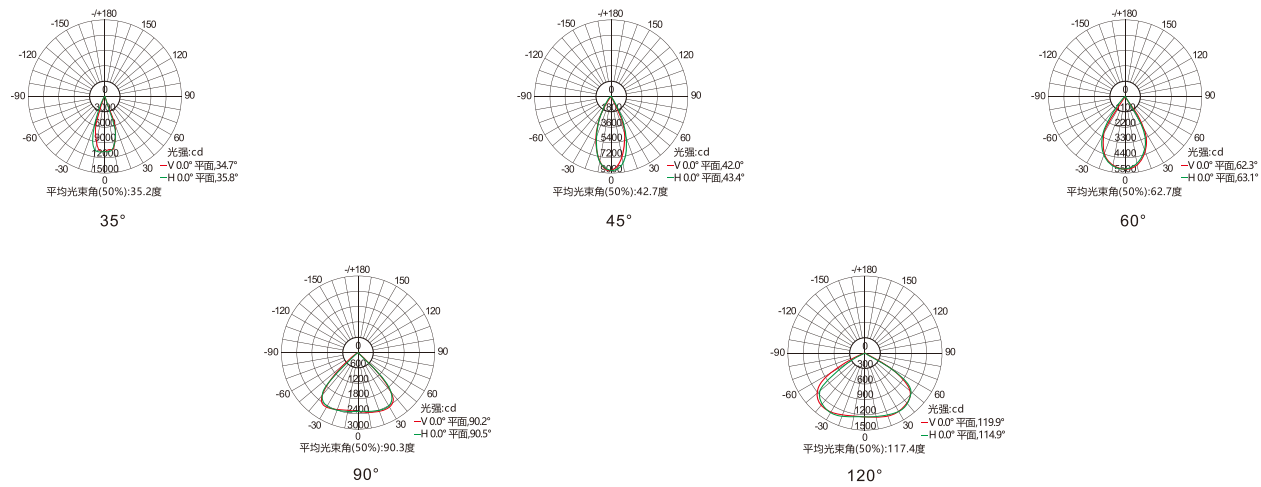




General Parameters

Product Name:	LED Floodlight
Power:	240W / 240W
Light Source:	7070
Number of LEDs:	72pcs / 48pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L661×W99×H250mm
Product Weight:	7.7KG
Packaging Size:	L675×W130×H265mm
Number of Pieces Per Box:	1PCS/8.2KG


"For more information, please visit: www.kupuled.com"



Product Size

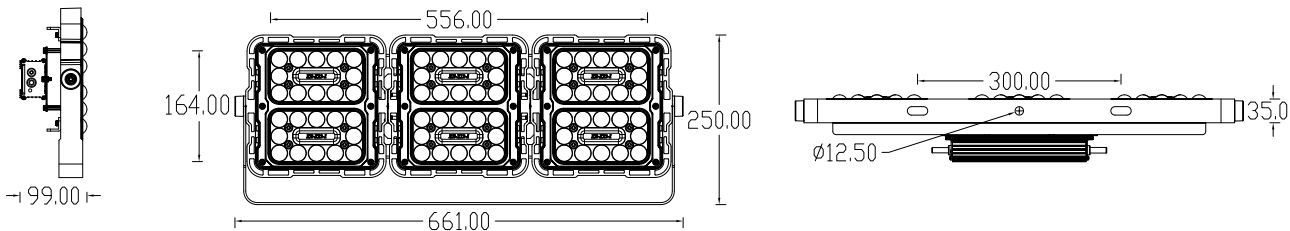

Light Specification

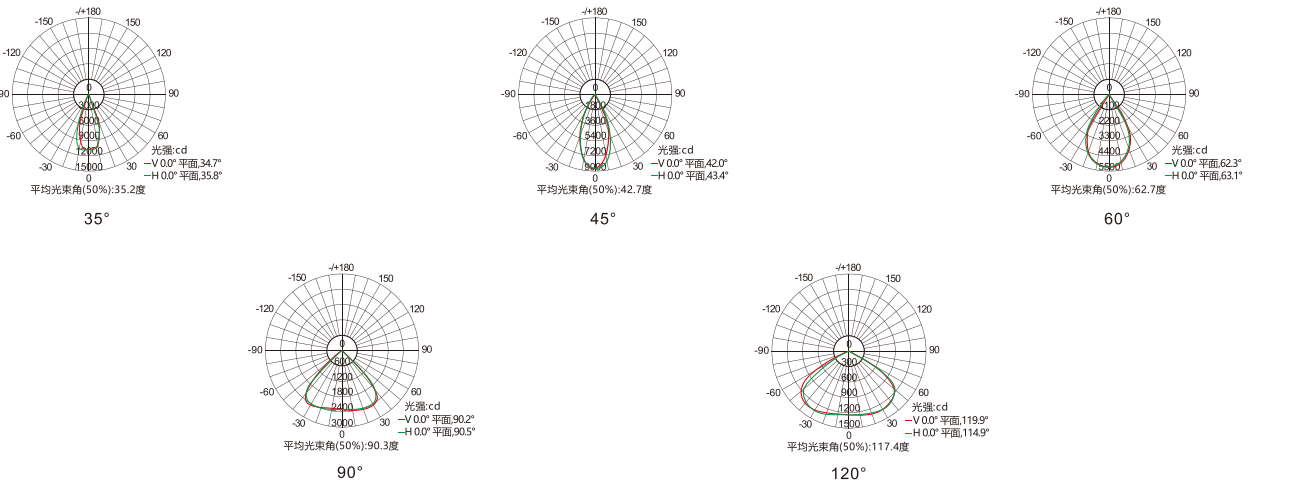




General Parameters

Product Name:	LED Floodlight
Power:	360W / 400W
Light Source:	7070
Number of LEDs:	96pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L433×W96.5×H423mm
Product Weight:	9.8KG
Packaging Size:	L450×W130×H440mm
Number of Pieces Per Box:	1PCS/10.7KG


"For more information, please visit: www.kupuled.com"




Product Size

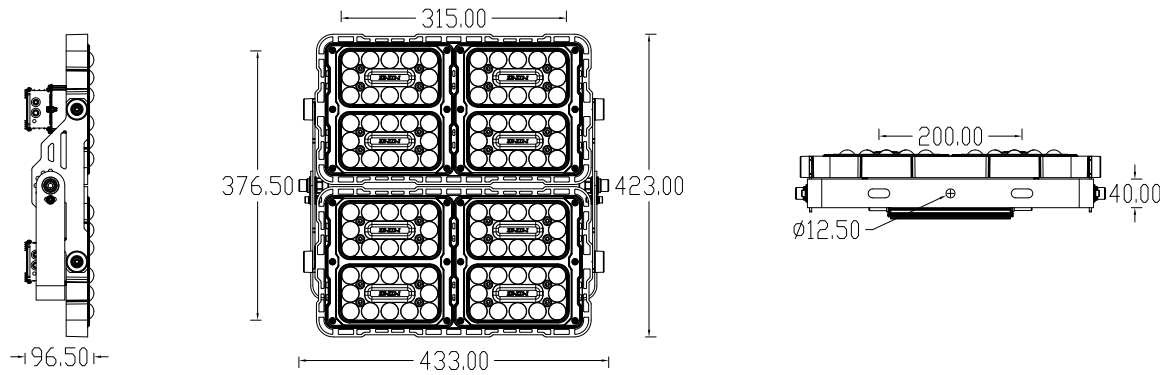

Light Specification

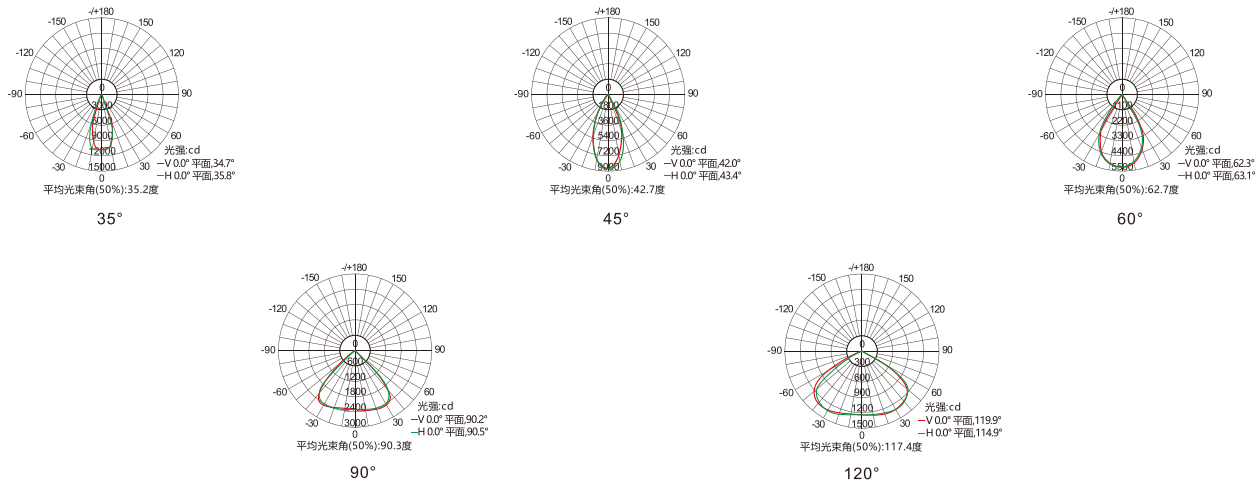

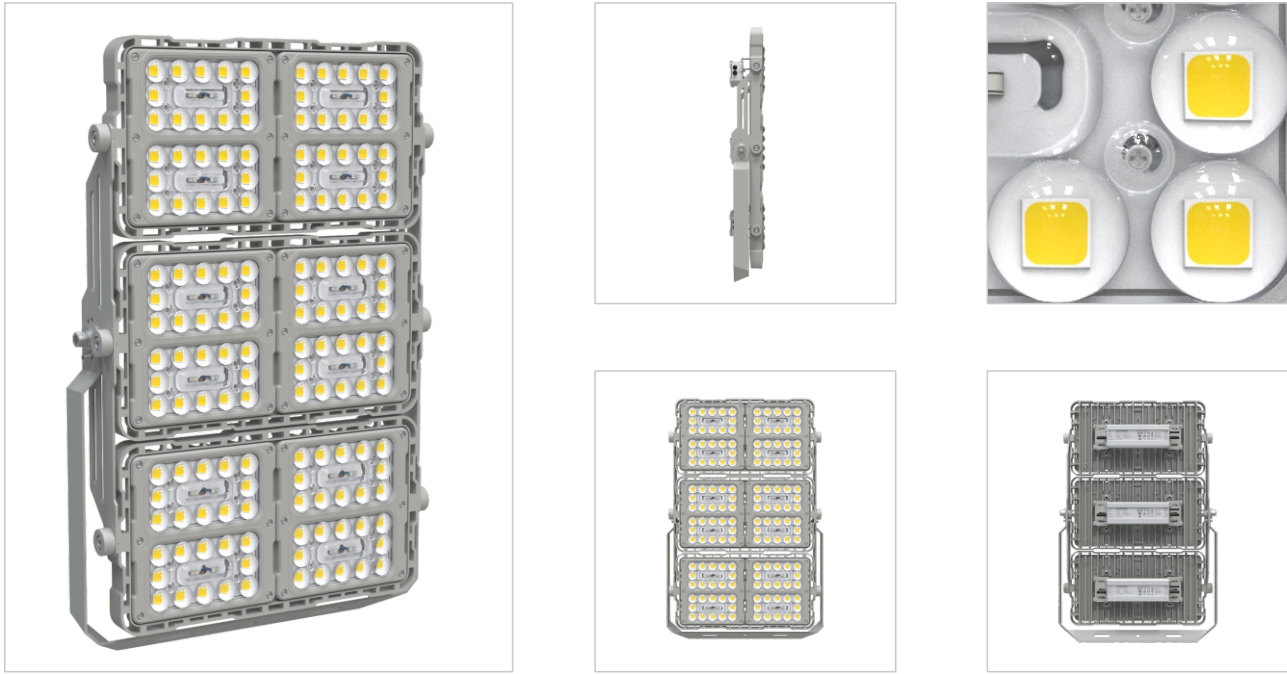


General Parameters

Product Name:	LED Floodlight
Power:	450W / 500W / 550W / 600W
Light Source:	7070
Number of LEDs:	144pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L437×W96.5×H636mm
Product Weight:	14.5KG
Packaging Size:	L450×W130×H650mm
Number of Pieces Per Box:	1PCS/15.6KG


"For more information, please visit: www.kupuled.com"



Product Size

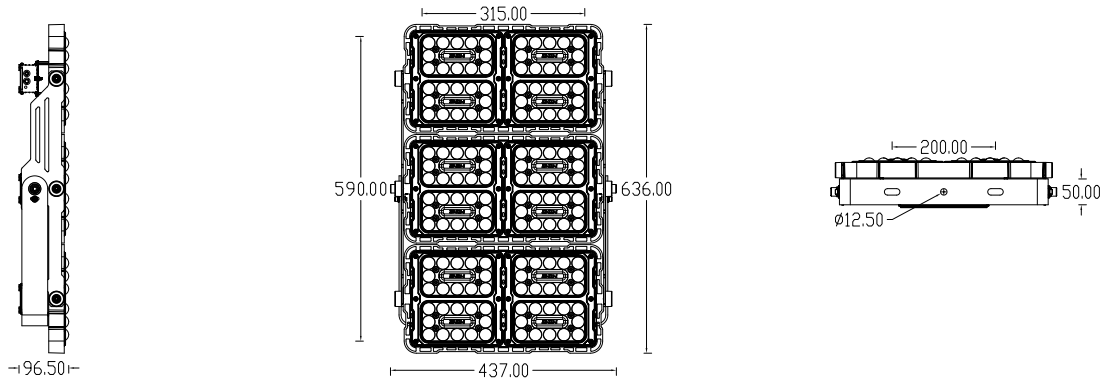

Light Specification

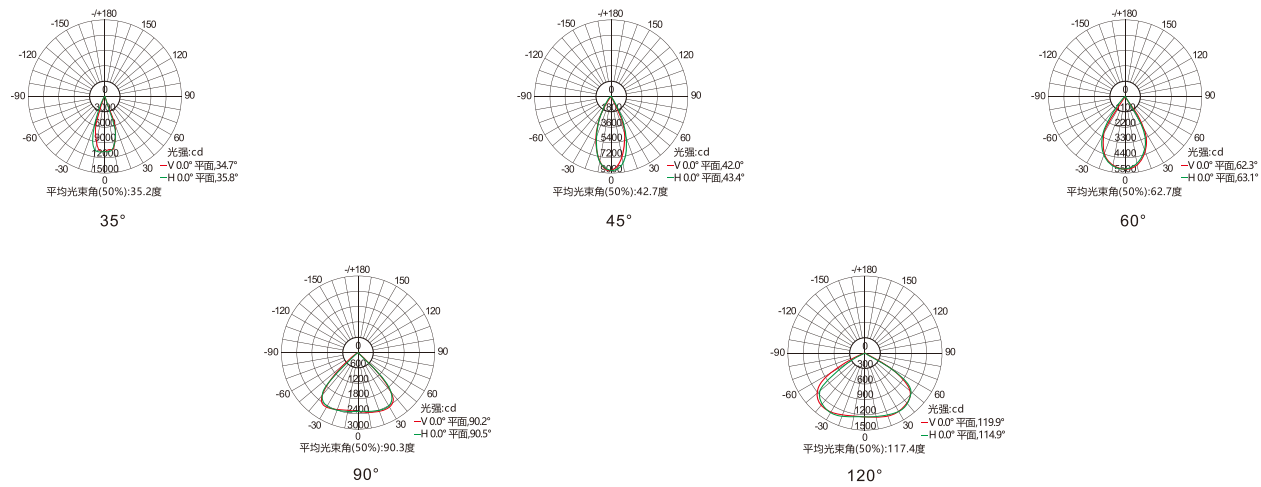




General Parameters

Product Name:	LED Floodlight
Power:	30W / 60W
Light Source:	7070
Number of LEDs:	12pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L223×W96.5×H168.5
Product Weight:	2.4KG
Packaging Size:	L240×W130×H185
Number of Pieces Per Box:	1PCS/2.9KG


"For more information, please visit: www.kupuled.com"




Product Size

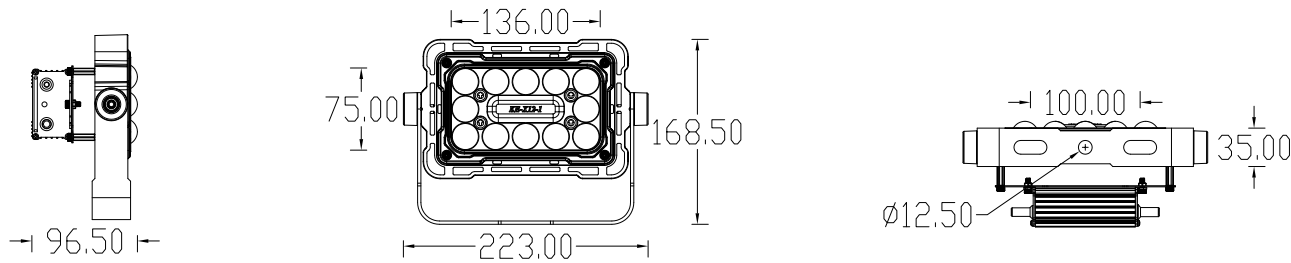

Light Specification

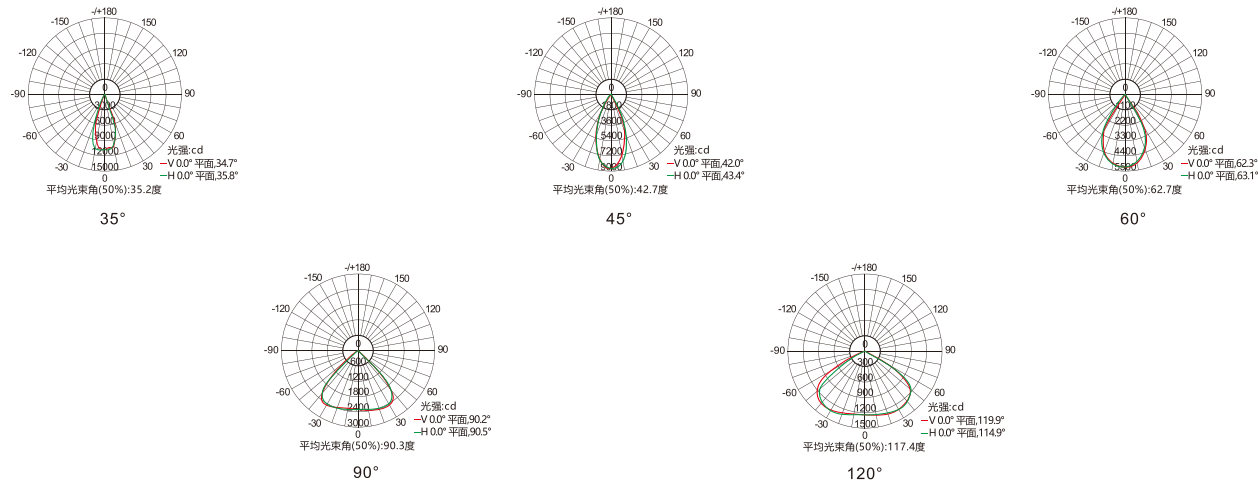

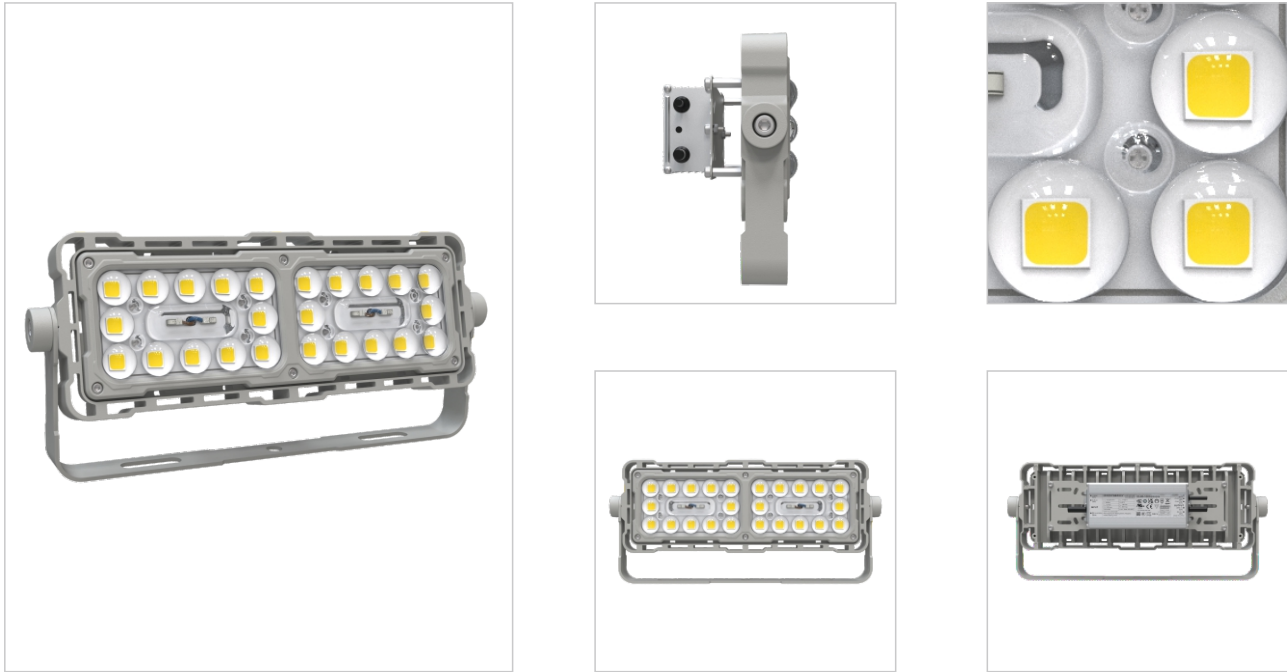


General Parameters

Product Name:	LED Floodlight
Power:	80W / 100W / 120W
Light Source:	7070
Number of LEDs:	24pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L373×W96.5×H168.5
Product Weight:	3.7KG
Packaging Size:	L390×W130×H180
Number of Pieces Per Box:	1PCS/4.3KG


"For more information, please visit: www.kupuled.com"



Product Size

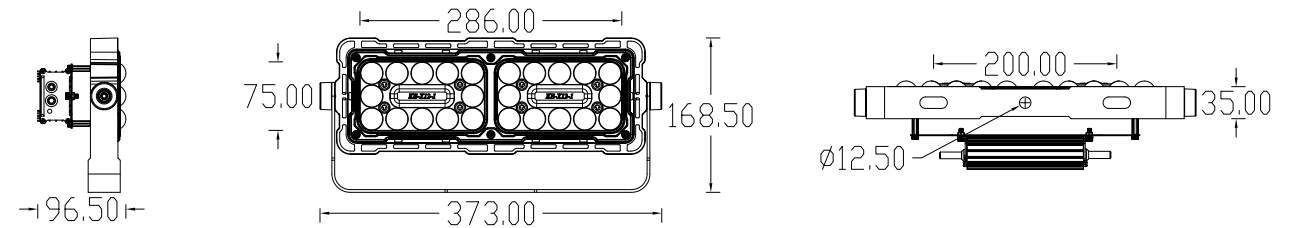

Light Specification

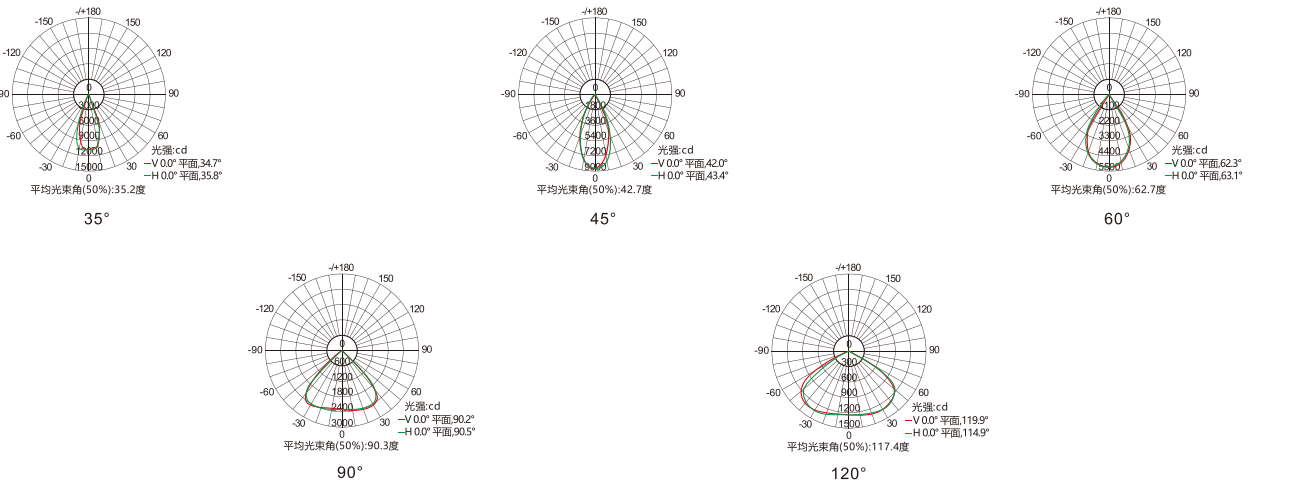




General Parameters

Product Name:	LED Floodlight
Power:	150W
Light Source:	7070
Number of LEDs:	36pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L236×W96.5×H387
Product Weight:	5.1KG
Packaging Size:	L250×W130×H410
Number of Pieces Per Box:	1PCS/5.7KG


"For more information, please visit: www.kupuled.com"



Product Size

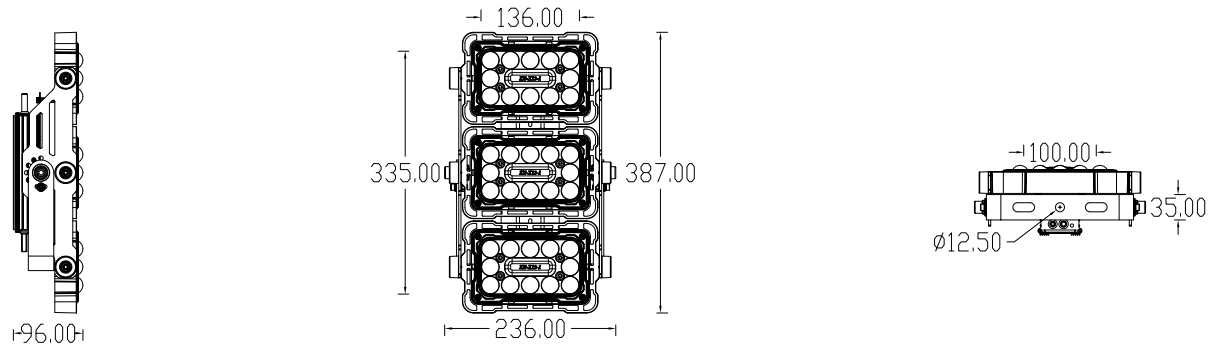

Light Specification

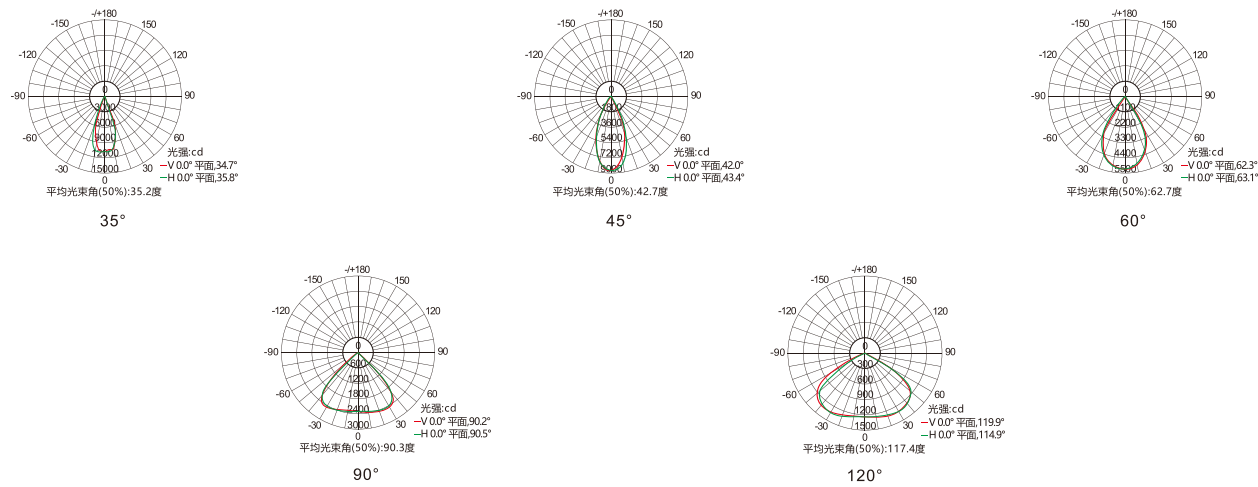




General Parameters

Product Name:	LED Floodlight
Power:	200W / 240W
Light Source:	7070
Number of LEDs:	48pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L236×W96.5×H387
Product Weight:	5.1KG
Packaging Size:	L250×W130×H410
Number of Pieces Per Box:	1PCS/5.7KG


"For more information, please visit: www.kupuled.com"



Product Size

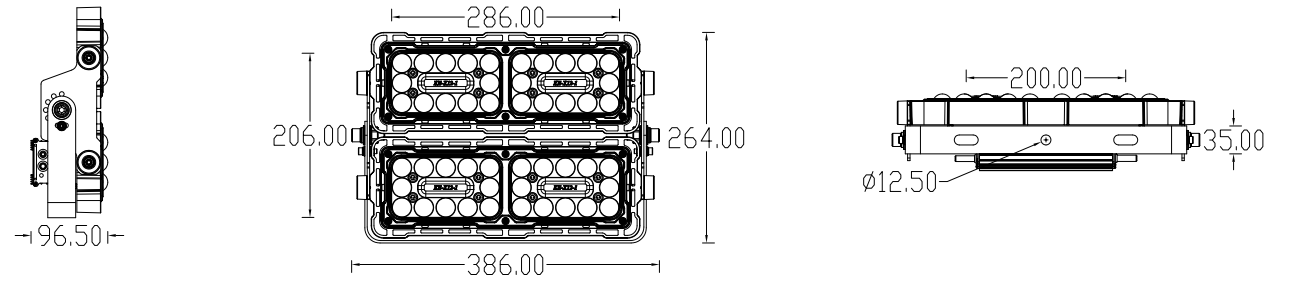

Light Specification

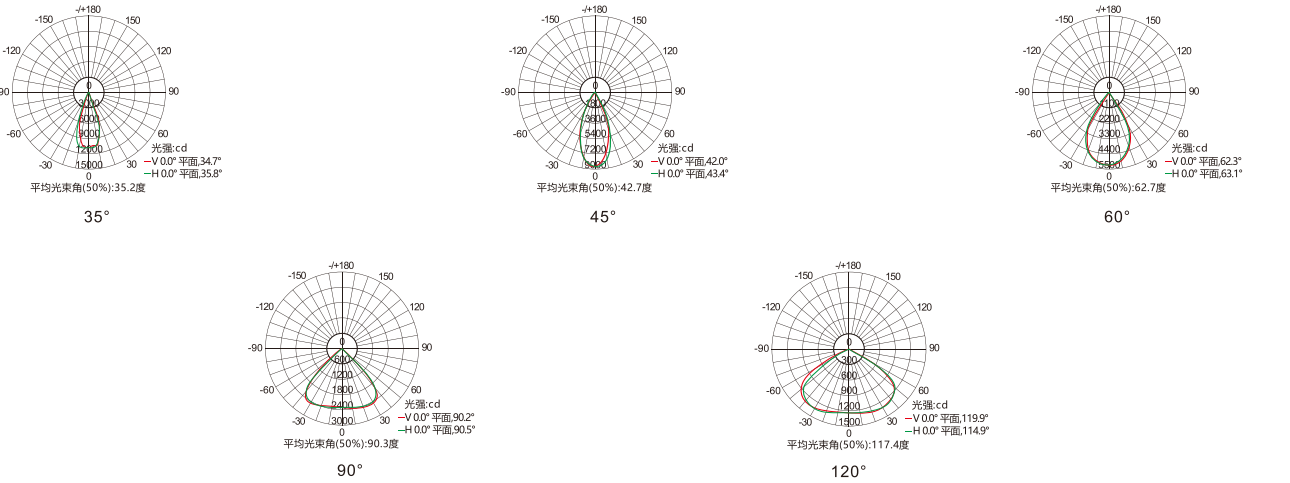




General Parameters

Product Name:	LED Floodlight
Power:	300W / 360W
Light Source:	7070
Number of LEDs:	72pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L186×W105×H389
Product Weight:	9.3KG
Packaging Size:	L405×W130×H405
Number of Pieces Per Box:	1PCS/9.9KG


"For more information, please visit: www.kupuled.com"



Product Size

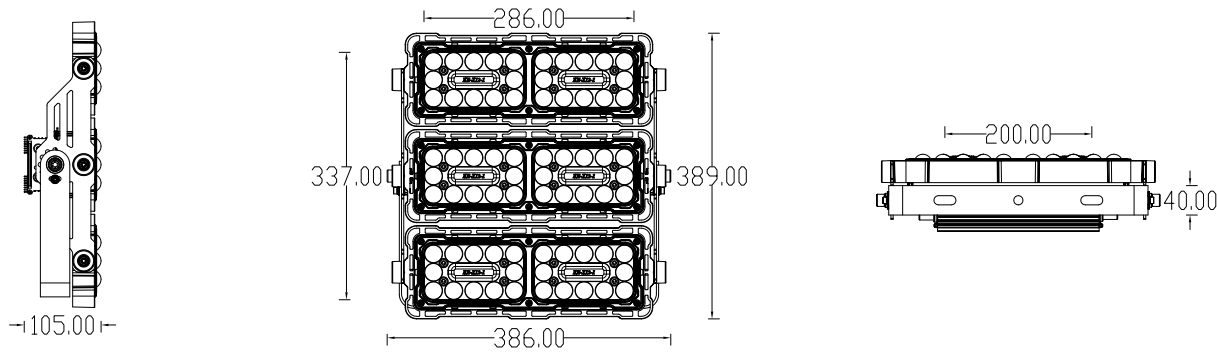

Light Specification

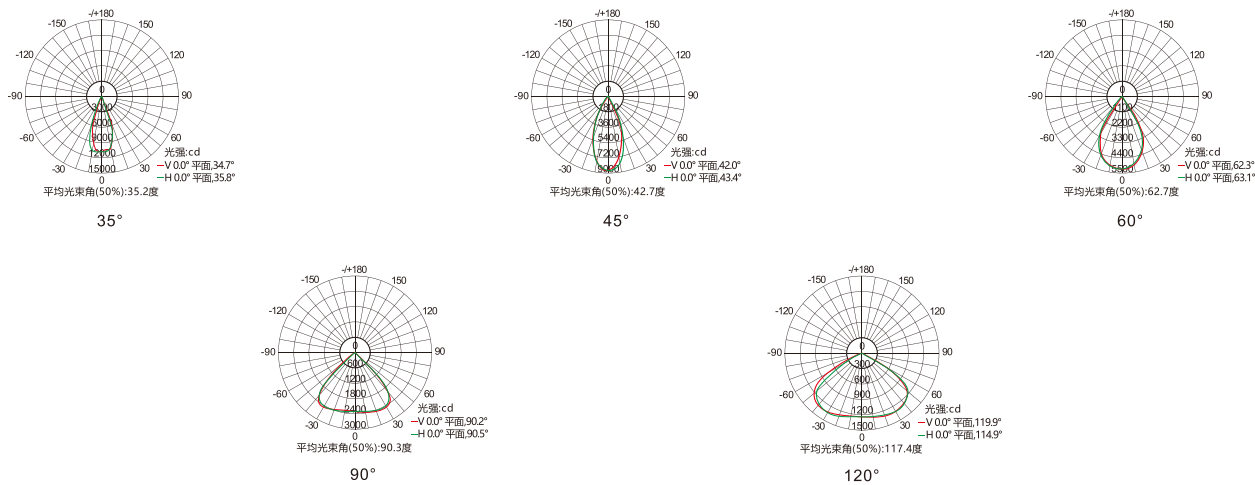




General Parameters

Product Name:	LED Floodlight
Power:	400W/ 480W
Light Source:	7070
Number of LEDs:	96pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	35°/45°/ 60°/90° / 120°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L386×W105×H520
Product Weight:	12.2KG
Packaging Size:	L400×W130×H535
Number of Pieces Per Box:	1PCS/13KG


"For more information, please visit: www.kupuled.com"



Product Size

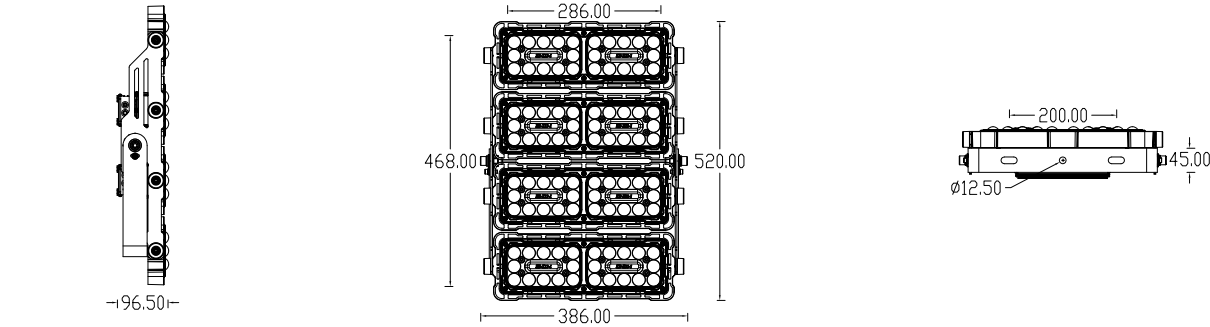

Light Specification

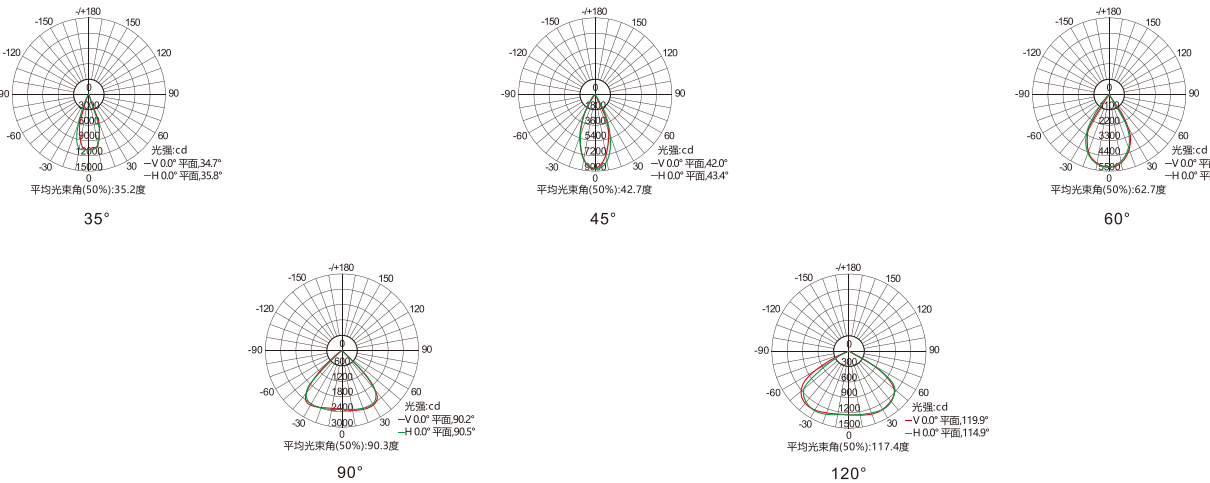




General Parameters

Product Name:	Street Lamp
Power:	30W / 50W
Light Source:	7070
Number of LEDs:	20pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L315×W116×H540
Product Weight:	3.4KG
Packaging Size:	L330×W145×H555
Number of Pieces Per Box:	1PCS/3.8KG


"For more information, please visit: www.kupuled.com"



Product Size

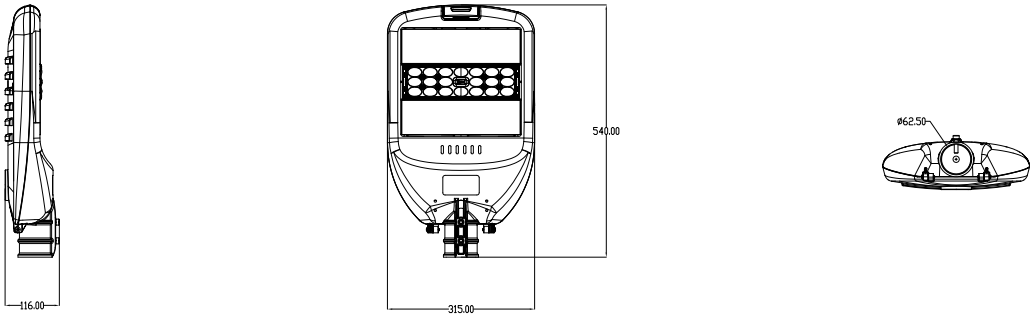

Light Specification

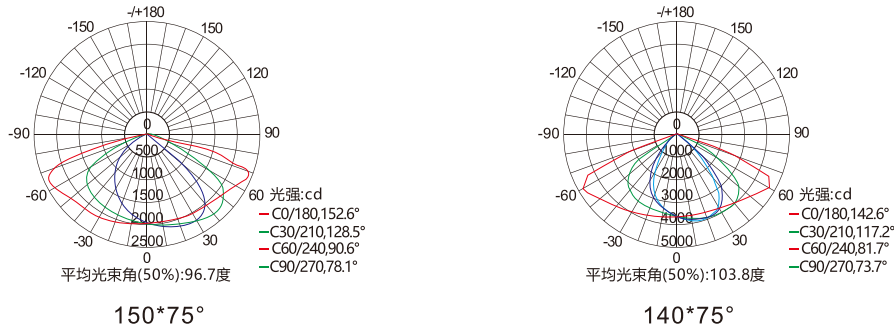





General Parameters

Product Name:	Street Lamp
Power:	100W / 150W
Light Source:	7070
Number of LEDs:	40pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L315×W116×H540
Product Weight:	3.9KG
Packaging Size:	L330×W145×H555
Number of Pieces Per Box:	1PCS/4.5KG


"For more information, please visit: www.kupuled.com"

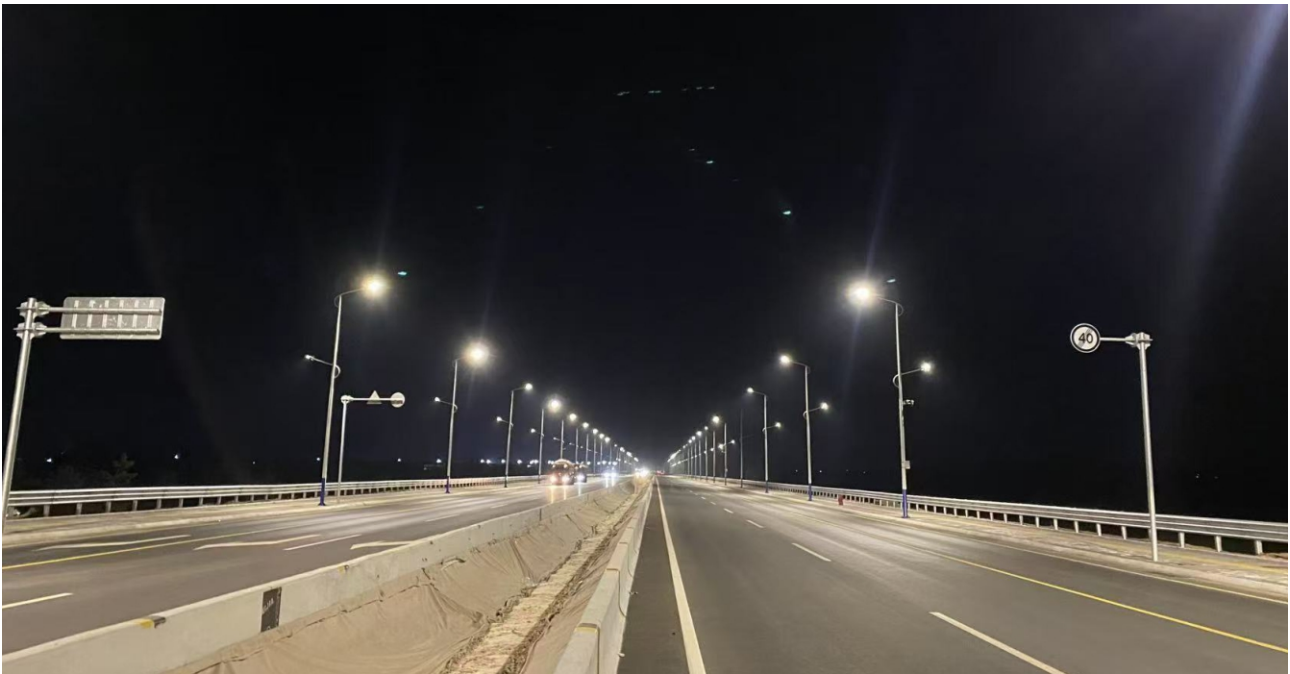

Product Size

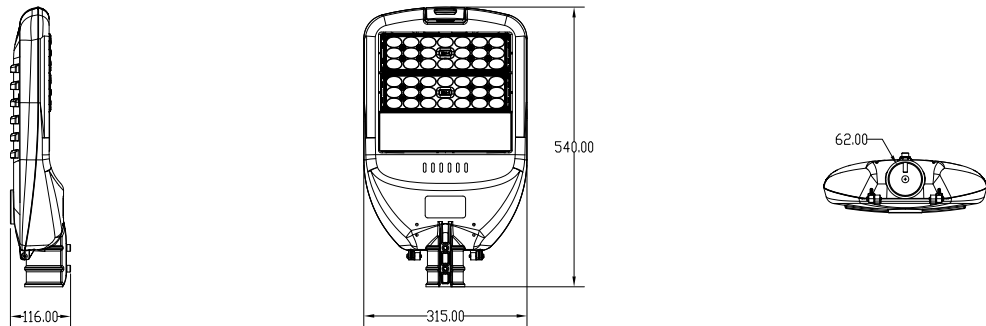

Light Specification

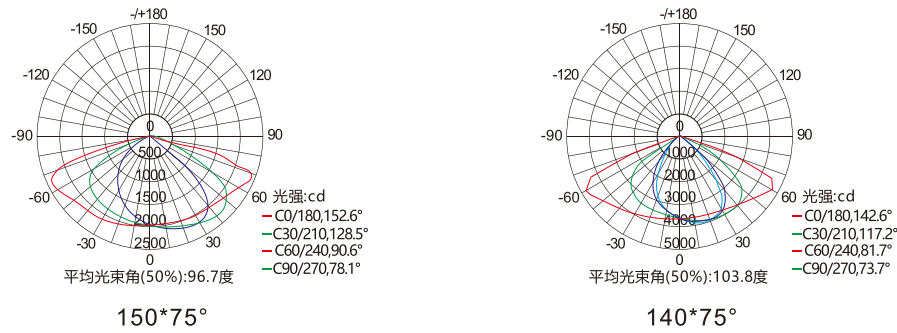




General Parameters

Product Name:	Street Lamp
Power:	200W / 240W / 300W
Light Source:	7070
Number of LEDs:	80pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L315×W118×H690
Product Weight:	7.7KG
Packaging Size:	L330×W150×H705
Number of Pieces Per Box:	1PCS/8.5KG


"For more information, please visit: www.kupuled.com"



Product Size

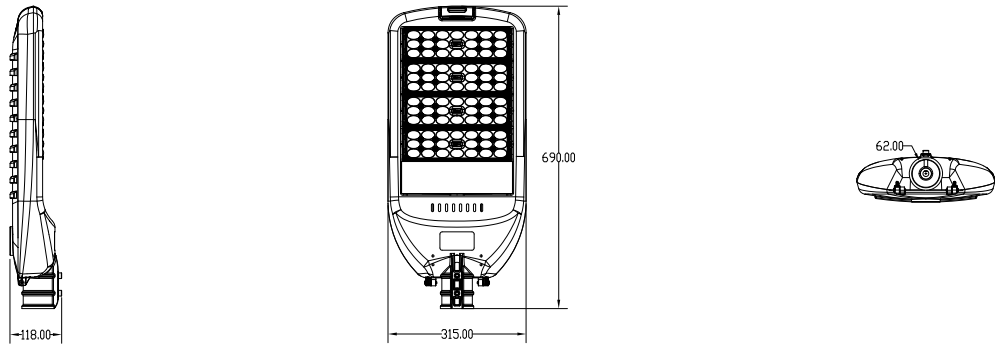

Light Specification

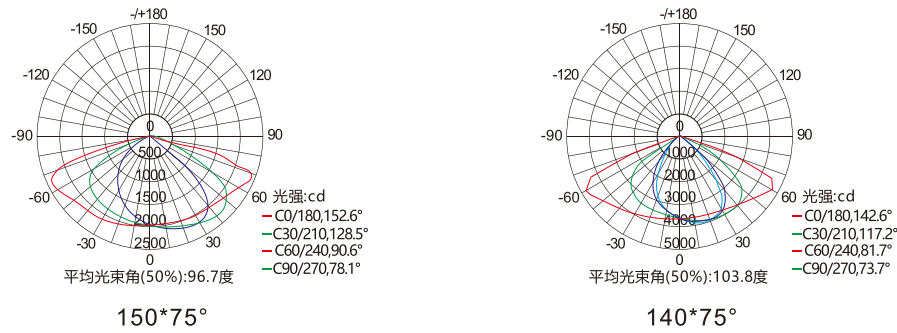




General Parameters

Product Name:	Street Lamp
Power:	30W
Light Source:	7070
Number of LEDs:	20pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L340×W340×H619
Product Weight:	3.4KG
Packaging Size:	L355×W180×H635
Number of Pieces Per Box:	1PCS/3.8KG


"For more information, please visit: www.kupuled.com"



Product Size

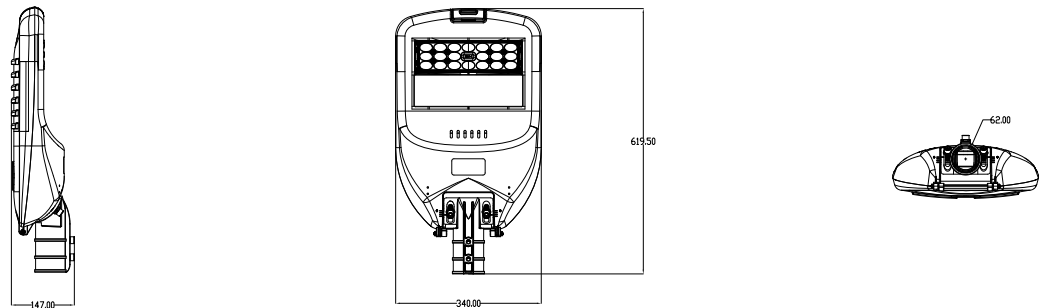

Light Specification

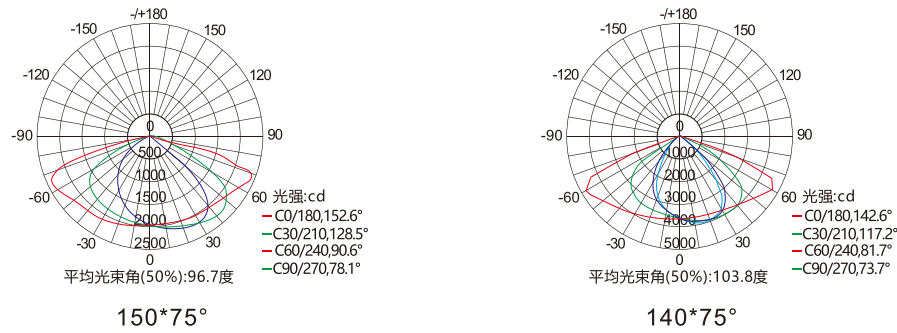





General Parameters

Product Name:	Street Lamp
Power:	50W
Light Source:	7070
Number of LEDs:	20pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L340×W340×H619
Product Weight:	3.4KG
Packaging Size:	L355×W180×H635
Number of Pieces Per Box:	1PCS/3.8KG


"For more information, please visit: www.kupuled.com"

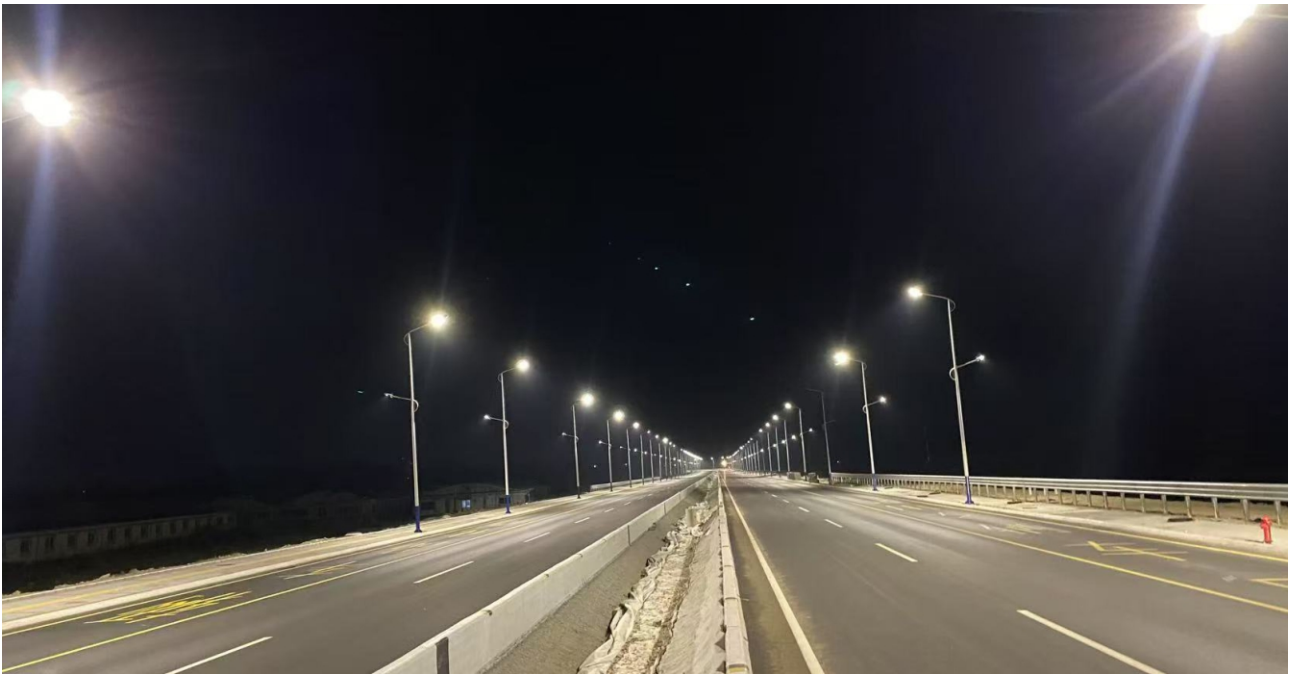

Product Size

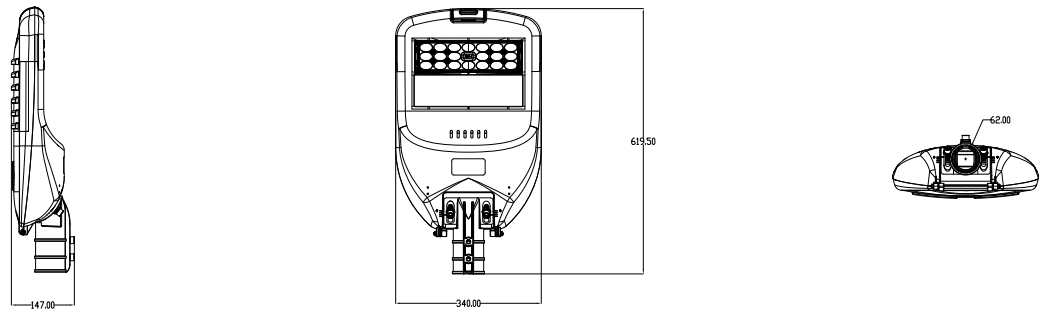

Light Specification

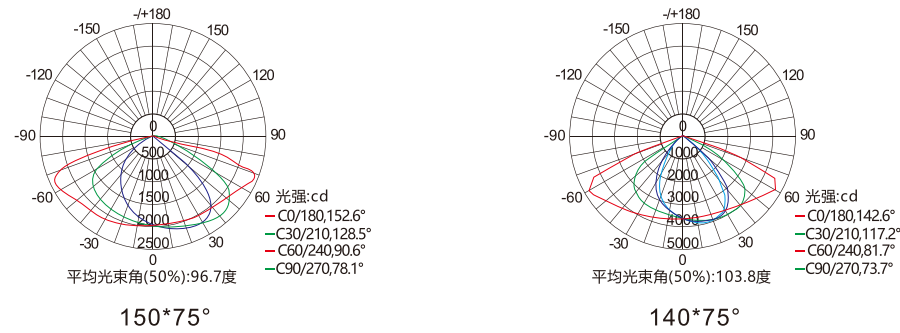




General Parameters

Product Name:	Street Lamp
Power:	100W
Light Source:	7070
Number of LEDs:	40pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L340×W147×H619
Product Weight:	4.3KG
Packaging Size:	L355×W180×H635
Number of Pieces Per Box:	1PCS/4.8KG


"For more information, please visit: www.kupuled.com"



Product Size

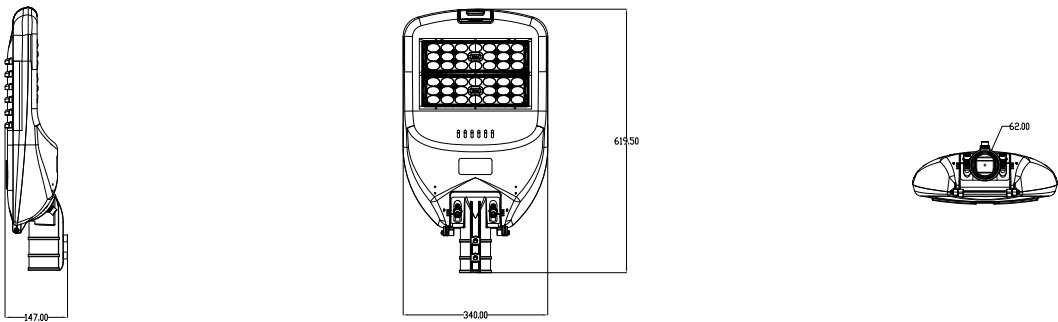

Light Specification

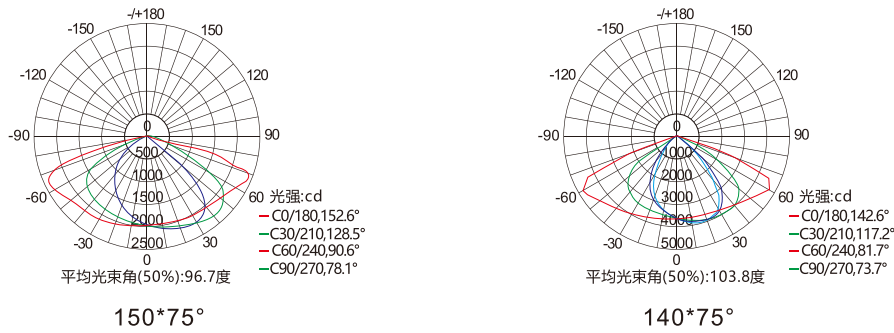




General Parameters

Product Name:	Street Lamp
Power:	150W
Light Source:	7070
Number of LEDs:	40pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L340×W147×H619
Product Weight:	4.3KG
Packaging Size:	L355×W180×H635
Number of Pieces Per Box:	1PCS/4.8KG


"For more information, please visit: www.kupuled.com"



Product Size

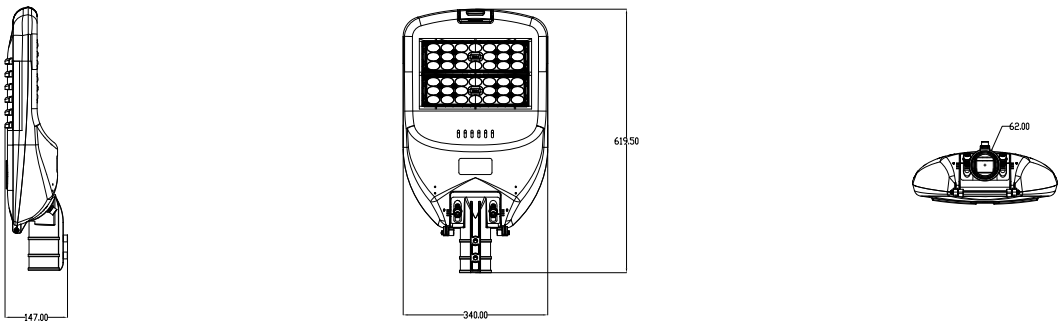

Light Specification

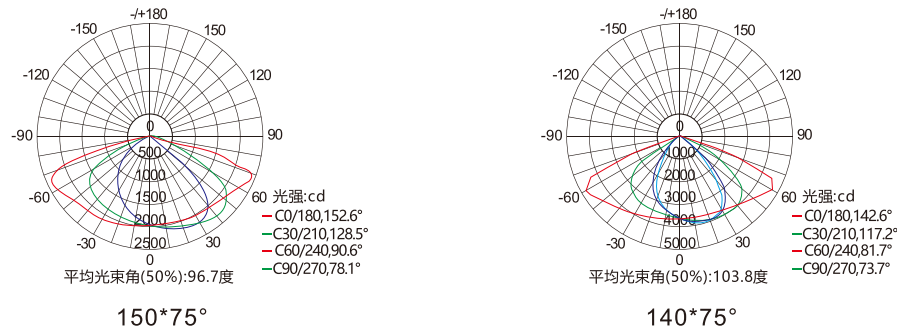




General Parameters

Product Name:	Street Lamp
Power:	200W
Light Source:	7070
Number of LEDs:	80pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L350×W147×H783
Product Weight:	8.2KG
Packaging Size:	L365×W180×H805
Number of Pieces Per Box:	1PCS/8.9KG


"For more information, please visit: www.kupuled.com"



Product Size

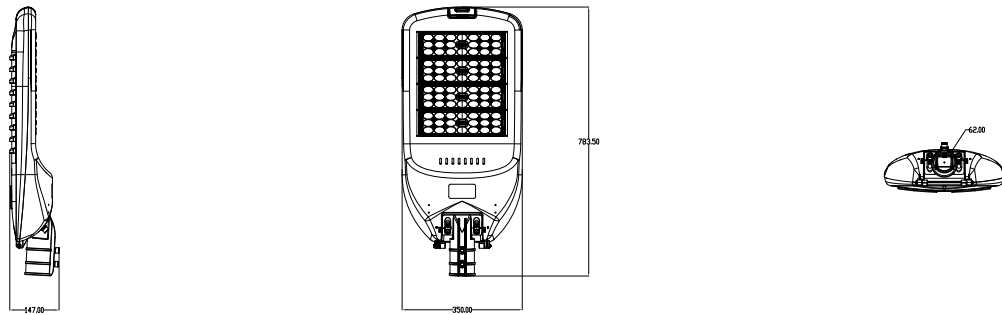

Light Specification

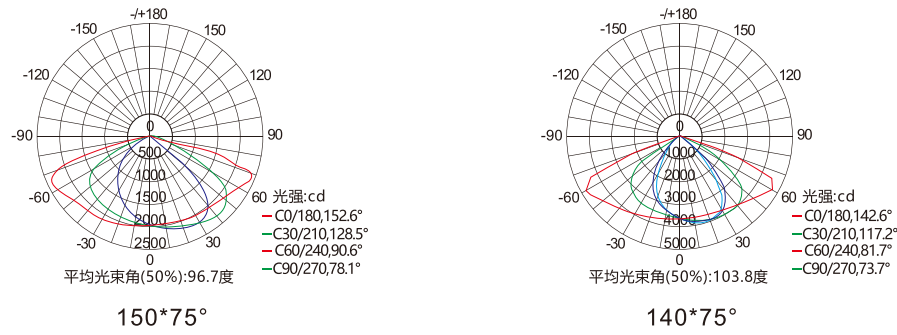




General Parameters

Product Name:	Street Lamp
Power:	240W
Light Source:	7070
Number of LEDs:	80pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF
Lens Angle:	150×75°
Protection Grade:	IP66
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die-cast aluminum + high borosilicate tempered glass lens
Product Size:	L350×W147×H783
Product Weight:	8.2KG
Packaging Size:	L365×W180×H805
Number of Pieces Per Box:	1PCS/8.9KG


"For more information, please visit: www.kupuled.com"



Product Size

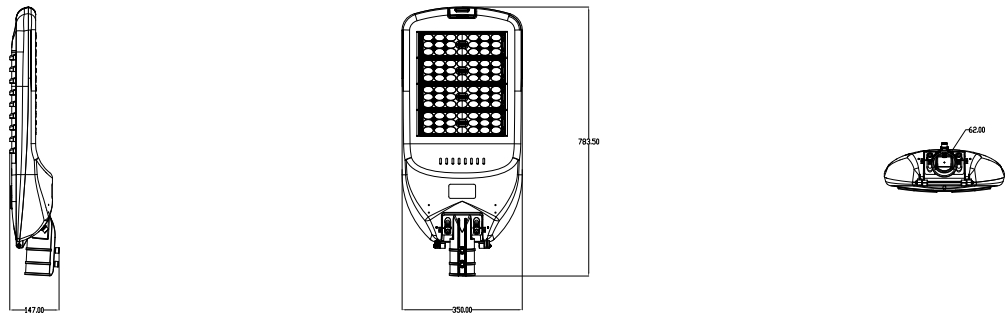

Light Specification

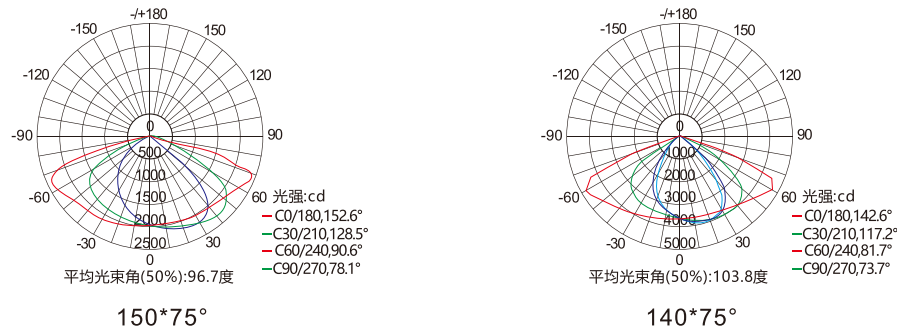




General Parameters

Product Name:	LED Street Light
Power:	50W
Light Source:	2835
Number of LEDs:	144pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF light control, segmented time control, dimming 0-10V
Lens Angle:	30 ° 45 ° 60 ° 90 °
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die cast aluminum+tempered glass
Product Size:	L415×W176×H55
Product Weight:	1.75KG
Packaging Size:	455×230×110
Number of Pieces Per Box:	1PCS/2.5KG


"For more information, please visit: www.kupuled.com"



Product Size

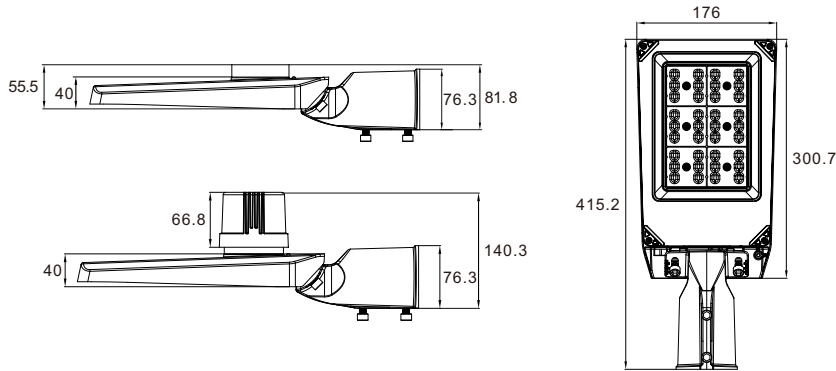

Light Specification

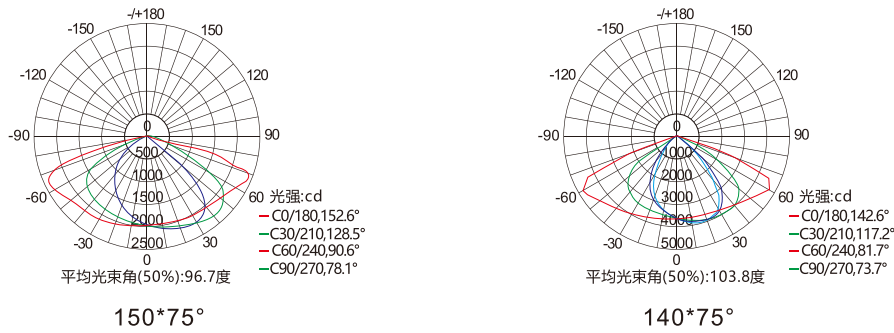




General Parameters

Product Name:	LED Street Light
Power:	100W
Light Source:	2835
Number of LEDs:	288pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF light control, segmented time control, dimming 0-10V
Lens Angle:	30 ° 45 ° 60 ° 90 °
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die cast aluminum+tempered glass
Product Size:	L475×W238×H55
Product Weight:	2.8KG
Packaging Size:	520×280×110
Number of Pieces Per Box:	1PCS


"For more information, please visit: www.kupuled.com"



Product Size

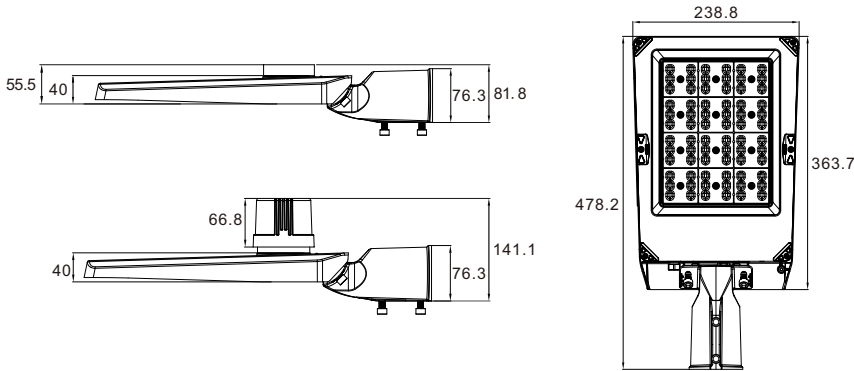

Light Specification

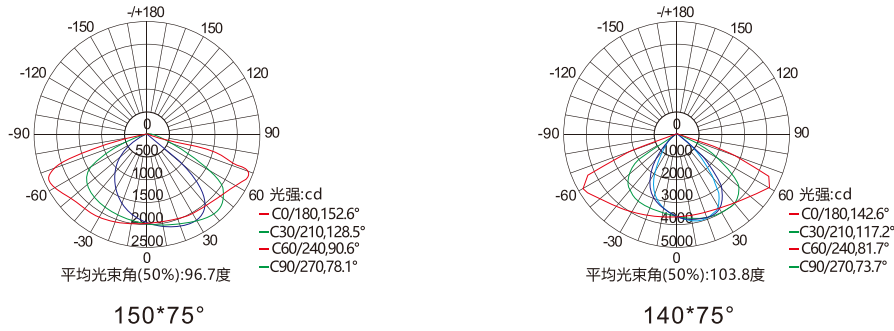




General Parameters

Product Name:	LED Street Light
Power:	150W
Light Source:	2835
Number of LEDs:	360pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF light control, segmented time control, dimming 0-10V
Lens Angle:	30 ° 45 ° 60 ° 90 °
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die cast aluminum+tempered glass
Product Size:	L522×W245×H55
Product Weight:	3.3KG
Packaging Size:	560×280×110
Number of Pieces Per Box:	1PCS


"For more information, please visit: www.kupuled.com"



Product Size

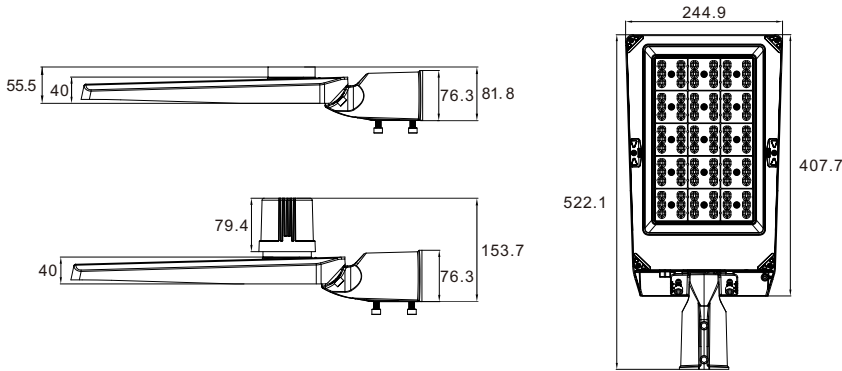

Light Specification

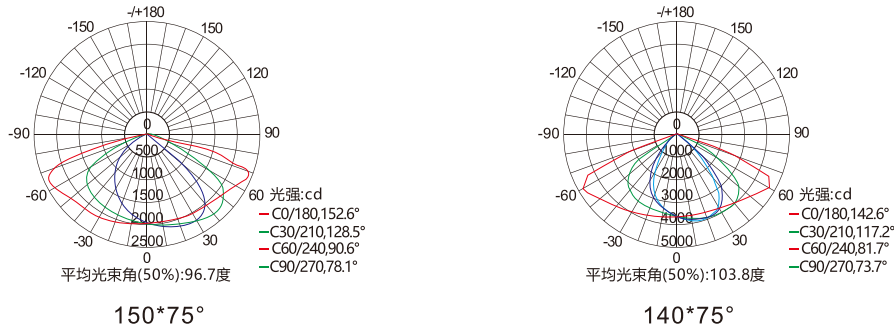




General Parameters

Product Name:	LED Street Light
Power:	200W
Light Source:	2835
Number of LEDs:	576pcs
Luminous Efficiency:	160-180LM/W
Color Temperature:	2700-5700K
Voltage:	AC110-220V
Control Method:	ON/OFF light control, segmented time control, dimming 0-10V
Lens Angle:	30 ° 45 ° 60 ° 90 °
Protection Grade:	IP65
Color Rendering Index:	≥70Ra
Power Factor:	≥0.95
Operating Temperature:	-40℃-50℃
Lamp Body Material:	ADC12 die cast aluminum+tempered glass
Product Size:	L595×W302×H55
Product Weight:	4.6KG
Packaging Size:	635×335×110
Number of Pieces Per Box:	1PCS


"For more information, please visit: www.kupuled.com"



Product Size

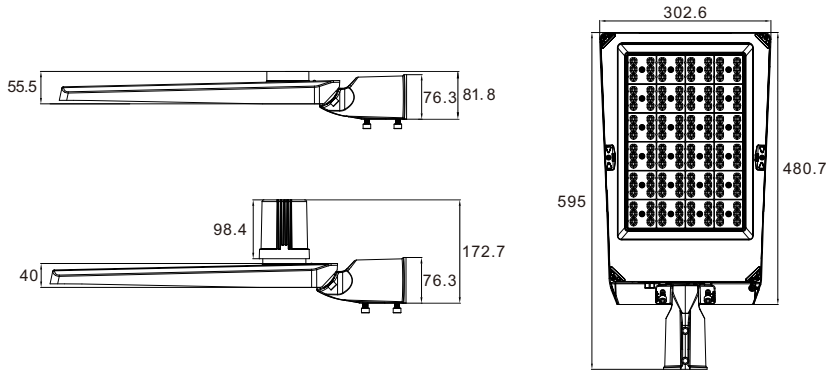


Light Specification

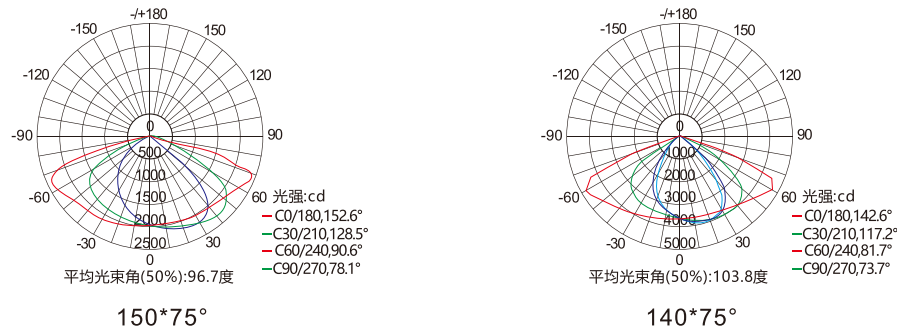


All-in-One
Solar Street Light

"For more information, please visit: www.kupuled.com"

Product Size

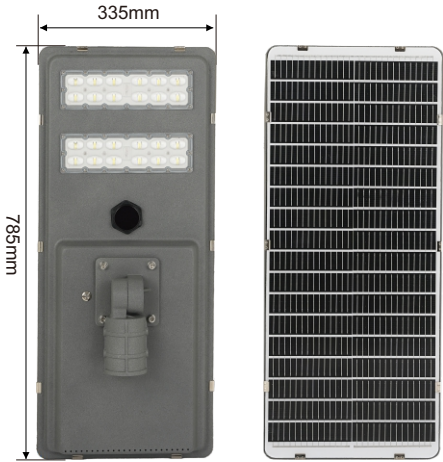

Light Specification

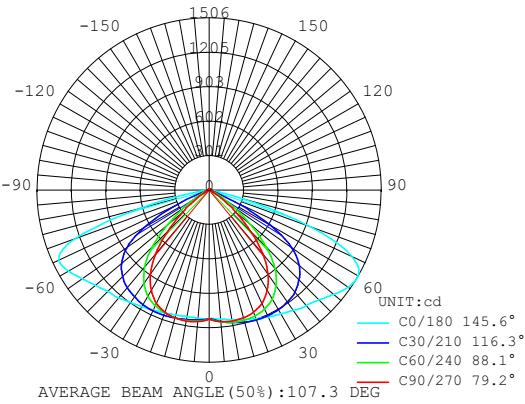

General Parameters


Product Name:	Solar Street Light
Power:	40W
Solar panel:	6V/40W Monocrystal
Battery:	3.2V /45Ah New LiFeCoPO4
Lamp size:	785×335×150mm
Solar panel Size:	780×330×3mm
Solar Controller:	3.2V/20W PWM
Lamp material:	Aluminium
Working mode:	light /microwave/radar induction.
Full Charge time:	6-8 hours
Lighting time:	3-4nights
Luminous efficiency:	≥200lm/W
Install height:	4-5meters
Weight:	7.5 kgs
LED Chips:	5054/48pcs
Packing size:	84×17.5×37.5cm




All-in-One
Solar Street Light

"For more information, please visit: www.kupuled.com"

Product Size

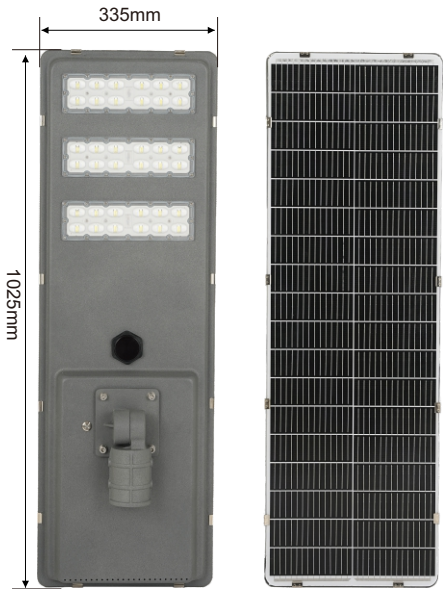

Light Specification

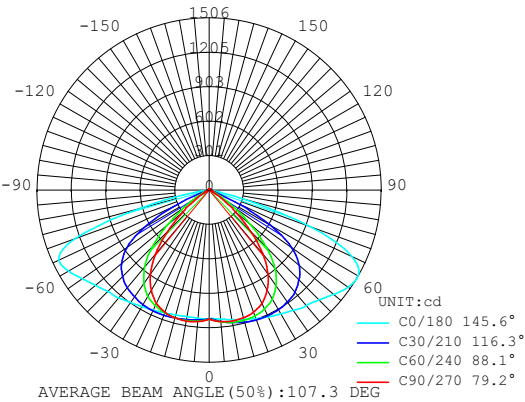

General Parameters


Product Name:	Solar Street Light
Power:	60W
Solar panel:	18V/60W Monocrystal
Battery:	12.8V / 15Ah New LiFeCoPO4
Lamp size:	1025×335×150mm
Solar panel Size:	1020×330×3mm
Solar Controller:	12.8V/30W PWM
Lamp material:	Aluminium
Working mode:	light /microwave/radar induction.
Full Charge time:	6-8 hours
Lighting time:	3-4nights
Luminous efficiency:	≥200lm/W
Install height:	5-6meters
Weight:	9.5 kgs
LED Chips:	5054/72pcs
Packing size:	108×17.5×37.5cm




All-in-One Solar Street Light

"For more information, please visit: www.kupuled.com"

Product Size

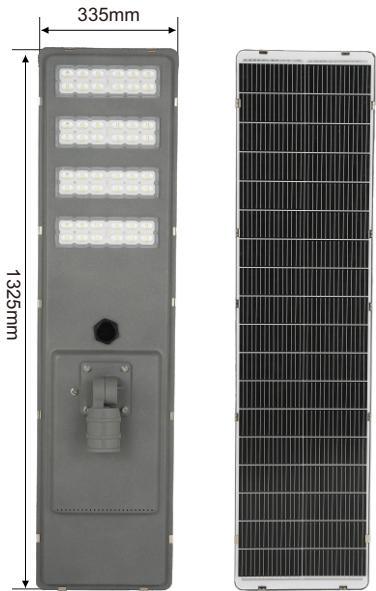

Light Specification

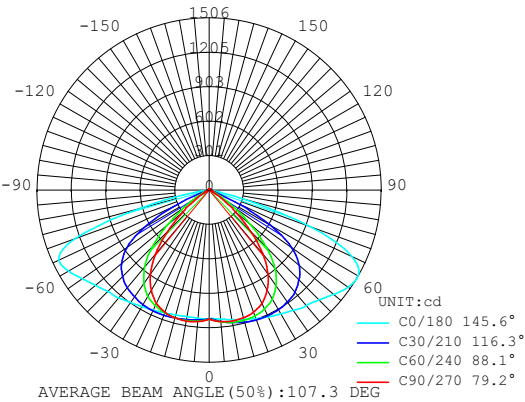

General Parameters


Product Name:	Solar Street Light
Power:	80W
Solar panel:	18V/80W Monocrystal
Battery:	12.8V / 18Ah New LiFeCoPO4
Lamp size:	1325×335×120mm
Solar panel Size:	1320×330×3mm
Solar Controller:	12.8V/40W PWM
Lamp material:	Aluminium
Working mode:	light /microwave/radar induction.
Full Charge time:	6-8 hours
Lighting time:	3-4nights
Luminous efficiency:	≥200lm/W
Install height:	6-7meters
Weight:	9.5 kgs
LED Chips:	5054/96pcs
Packing size:	139×17.5×37.5cm



Solar Street Light KUPU-TER-Y40

kupu

Product Size

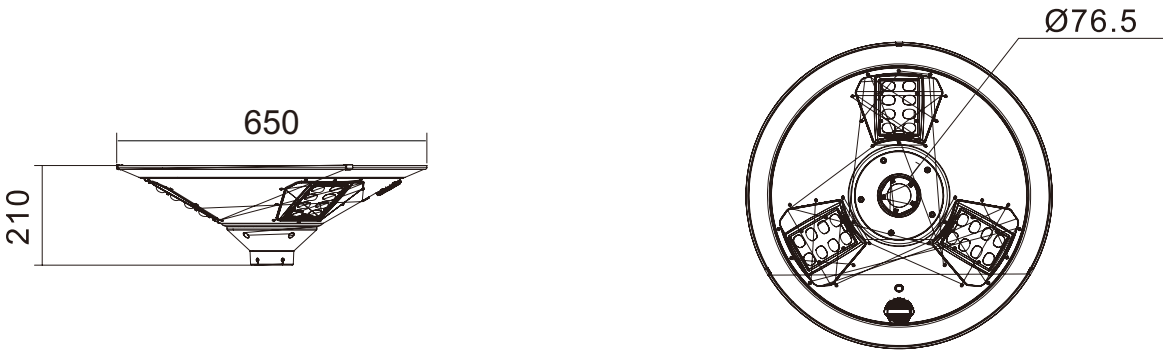

General Parameters

Product Name:	Solar Garden Light
Power:	40W
Solar panel:	6V/40W Monocrystal
Battery:	3.2V / 42Ah New LiFeCoPO4
Lamp size:	650×650×210mm
Solar panel Size:	640×640×3mm
Controller:	3.2V/20W PWM
Lamp Material :	Aluminium
Working mode:	light /microwave/radar induction.
Full Charge time:	6-8 hours
Lighting time:	18-20hrs
Luminous efficiency:	≥200lm/W
Install height:	3-4 meters
Net Weight:	6.9 kgs
Gross Weight:	8.6kgs
LED Chips:	5054/96pcs
Packing size:	69×69×17.5cm

"For more information, please visit: www.kupuled.com"



"For more information, please visit: www.kupuled.com"

Product Size




General Parameters

Product Name:	Solar Garden Light
Power:	50W
Solar panel:	18V/50W Monocrystal
Battery:	12.8V /12Ah New LiFeCoPO4
Lamp size:	650×650×210mm
Solar panel Size:	640×640×3mm
Controller:	12.8V/30W PWM
Lamp Material :	Aluminium
Working mode:	light /microwave/radar induction.
Full Charge time:	6-8 hours
Lighting time:	18-20hrs
Luminous efficiency:	≥200lm/W
Install height:	4-5 meters
Net Weight:	7.1 kgs
Gross Weight:	8.8kgs
LED Chips:	5054/96pcs
Packing size:	69×69×17.5cm



"For more information, please visit: www.kupuled.com"

Product Size

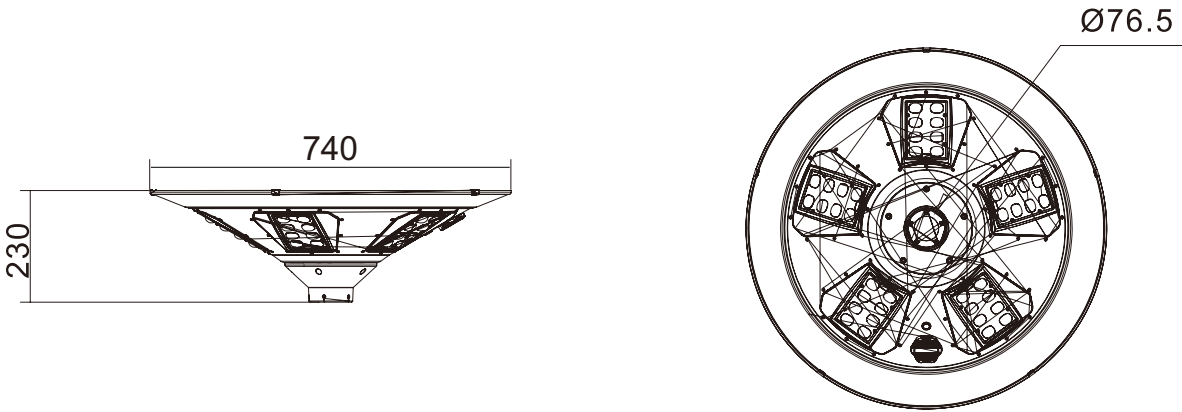


General Parameters

Product Name:	Solar Garden Light
Power:	60W
Solar panel:	18V/60W Monocrystal
Battery:	12.8V / 18Ah New LiFeCoPO4
Lamp size:	740×740×230mm
Solar panel Size:	730×730×3mm
Controller:	12.8V/40W PWM
Lamp Material :	Aluminium
Working mode:	light /microwave/radar induction.
Full Charge time:	6-8 hours
Lighting time:	18-20hrs
Luminous efficiency:	≥200lm/W
Install height:	5-6 meters
Net Weight:	9.3 kgs
Gross Weight:	11.5 kgs
LED Chips:	5054/160pcs
Packing size:	78×78×18cm



Solar Street Light KUPU-TER-Y80

Product Size

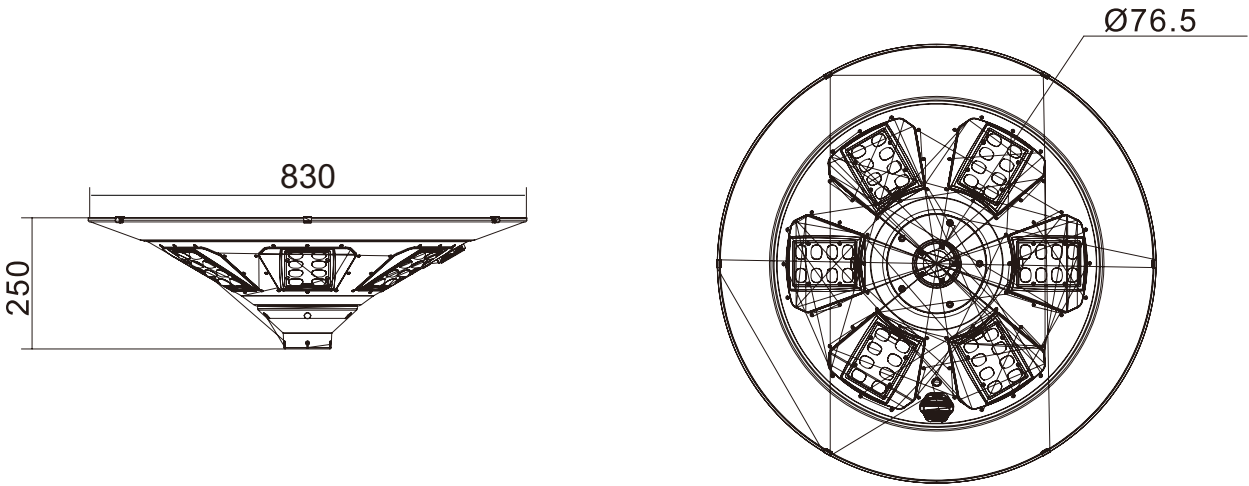

General Parameters

Product Name:	Solar Garden Light
Power:	80W
Solar panel:	18V/80W Monocrystal
Battery:	12.8V / 24Ah New LiFeCoPO4
Lamp size:	830×830×250mm
Solar panel Size:	820×820×3mm
Controller:	12.8V 50W MPPT
Lamp Material :	Aluminium
Working mode:	light /microwave/radar induction.
Full Charge time:	6-8 hours
Lighting time:	18-20hrs
Luminous efficiency:	≥200lm/W
Install height:	7-8meters
Net Weight:	11.4kgs
Gross Weight:	13.9kgs
LED Chips:	5054/192pcs
Packing size:	85×85×19cm